



***Mars Atmosphere and Volatile Evolution
(MAVEN) Mission***

Extreme Ultraviolet Monitor (EUV)

PDS Archive

Software Interface Specification

[Rev. 1.0, 17 June 2014]

Prepared by

Francis G. Eparvier

eparvier@colorado.edu

MAVEN
Extreme Ultraviolet Monitor (EUV)

PDS Archive
Software Interface Specification

[Rev. 1.0, 17 June 2014]

Custodian:

_____	_____
Francis G. Eparvier	Date
EUV Archivist and Instrument Scientist	

Approved:

_____	_____
Laila Andersson	Date
LPW-EUV Instrument Scientist	

_____	_____
Robert R Ergun	Date
LPW Principal Investigator	

_____	_____
David L. Mitchell	Date
MAVEN SDWG Lead	

Alexandria DeWolfe
MAVEN Science Data Center

Date

Raymond J. Walker
PDS PPI Node Manager

Date

Thomas H. Morgan
PDS Project Manager

Date

Contents

1	Introduction	1
1.1	Distribution List	1
1.2	Document Change Log.....	1
1.3	TBD Items	1
1.4	Abbreviations	2
1.5	Glossary.....	4
1.6	MAVEN Mission Overview.....	6
1.6.1	Mission Objectives	6
1.6.2	Payload	7
1.7	SIS Content Overview	8
1.8	Scope of this document	8
1.9	Applicable Documents	8
1.10	Audience.....	8
2	EUV Instrument Description	10
2.1	Science Objectives	10
2.2	Operational Modes	11
2.3	Ground Calibration.....	11
2.4	Inflight Calibration	11
3	Data Overview	12
3.1	Data Processing Levels	12
3.2	Products	13
3.3	Product Organization.....	13
3.3.1	Collection and Basic Product Types	14
3.4	Bundle Products	15
3.5	Data Flow	16
4	Archive Generation.....	18
4.1	Data Processing and Production Pipeline.....	18
4.1.1	Raw Data Production Pipeline	18
4.1.2	Calibrated Data Production Pipeline	18
4.2	Data Validation.....	18

4.2.1	Instrument Team Validation.....	18
4.2.2	MAVEN Science Team Validation.....	19
4.2.3	PDS Peer Review	19
4.6	Data Transfer Methods and Delivery Schedule	20
4.7	Data Product and Archive Volume Size Estimates	21
4.8	Data Validation.....	22
4.9	Backups and duplicates	22
5	Archive organization and naming	24
5.1	Logical Identifiers	24
5.1.1	LID Formation.....	24
5.1.2	VID Formation	25
5.2	EUV Archive Contents.....	25
5.2.1	EUV calibrated.....	25
5.2.2	LPW modelled.....	26
5.2.3	EUV documentation	28
6	Archive product formats.....	29
6.1	Data File Formats	29
6.1.1	Calibrated data file structure	31
6.1.2	Modelled data file structure.....	32
6.2	Document Product File Formats.....	33
6.3	PDS Labels	33
6.3.1	XML Documents	33
6.4	Delivery Package.....	34
6.4.1	The Package	34
6.4.2	Transfer Manifest	34
6.4.3	Checksum Manifest.....	34
Appendix A	Support staff and cognizant persons	35
Appendix B	Naming conventions for MAVEN science data files	36
Appendix C	Sample Bundle Product Label.....	38
Appendix D	Sample Collection Product Label	39
Appendix E	Sample Data Product Labels	40
Appendix F	PDS Delivery Package Manifest File Record Structures	41
F.1	Transfer Package Directory Structure	41

F.2 Transfer Manifest Record Structure.....41
F.3 Checksum Manifest Record Structure41

List of Figures

Figure 1: Block diagram of LPW instrument (including EUV) 10
Figure 2: A graphical depiction of the relationship among bundles, collections, and basic products..... 14
Figure 3: MAVEN Ground Data System responsibilities and data flow. Note that this figure includes portions of the MAVEN GDS which are not directly connected with archiving, and are therefore not described in Section 3.5 above. 17
Figure 4: Duplication and dissemination of EUV archive products at PDS/PPI..... 23

List of Tables

Table 1: Distribution list 1

Table 2: Document change log 1

Table 3: List of TBD items 1

Table 4: Abbreviations and their meaning..... 2

Table 5: MAVEN EUV Archive Schema and Schematron 12

Table 6: Data processing level designations 12

Table 7: Collection product types 14

Table 8: EUV Bundles 15

Table 9: MAVEN PDS review schedule 19

Table 10: Archive bundle delivery schedule for EUV specific bundles..... 20

Table 11: EUV calibrated collection/product 25

Table 12: EUV modelled collections 26

Table 13: EUV modelled products 26

Table 14: Documentation collections 28

Table 15: Key Documentation associated with EUV 28

Table 16: CDF specific information in the CDF header..... 29

Table 17: EUV Header information that can exist in each file. See the individual products which fields are used 30

Table 18: Contents for euv.calibrated:data.bands data file..... 31

Table 19: Contents for euv.modelled:data.daily.spectra data files. 32

Table 20: Contents for euv.modelled:data.minute.spectra data files. 32

Table 21: Archive support staff 35

1 Introduction

This software interface specification (SIS) describes the format and content of the Extreme Ultraviolet monitor (EUV) Planetary Data System (PDS) data archive. It includes descriptions of the data products and associated metadata, and the archive format, content, and generation pipeline.

1.1 Distribution List

Table 1: Distribution list

Name	Organization	Email
Laila Andersson	LASP/LPW	Laila.Andersson@lasp.colorado.edu
Bob Ergun	LASP/LPW	Bob.Ergun@lasp.colorado.edu
Francis G. Eparvier	LASP/EUV	eparvier@colorado.edu
David Mitchell	SSL/PF	mitchell@ssl.berkeley.edu
Alexandria DeWolfe	LASP/SDC	alex.dewolfe@lasp.colorado.edu
Steve Joy	UCLA/PDS/PPI	sjoy@igpp.ucla.edu
Ray Walker	UCLA/PDS/PPI	rwalker@igpp.ucla.edu
Joe Mafi	UCLA/PDS/PPI	jmafi@igpp.ucla.edu
Reta Beebe	NMSU/PDS/Atmospheres	rbeebe@nmsu.edu
Lyle Huber	NMSU/PDS/Atmospheres	lhuber@nmsu.edu
Lynn Neakrase	NMSU/PDS/Atmospheres	lneakras@nmsu.edu

1.2 Document Change Log

Table 2: Document change log

Version	Change	Date	Affected portion
0.0	Initial template	2012-Aug-24	All
0.1	Updated template	2013-Feb-13	All
0.2	Updated template	2013-Apr-03	All
0.3	Updated template	2014-Jan-30	All
0.4	First draft	2014-Apr-28	All
0.5	Second draft	2014-Jun-12	All
1.0	Release for Signatures	2014-Jun-17	All

1.3 TBD Items

Table 3 lists items that are not yet finalized.

Table 3: List of TBD items

Item	Section(s)	Page(s)
Full references for PDS4 Standards Reference, and Data Provider's Handbook documents (to be provided by PDS/PPI)	1.9	

Sample labels (to be provided by PDS/PPI)	Appendices C, D, and E	
---	------------------------	--

1.4 Abbreviations

Table 4: Abbreviations and their meaning

Abbreviation	Meaning
ASCII	American Standard Code for Information Interchange
Atmos	PDS Atmospheres Node (NMSU, Las Cruces, NM)
CCSDS	Consultative Committee for Space Data Systems
CDR	Calibrated Data Record
CFDP	CCSDS File Delivery Protocol
CK	C-matrix Kernel (NAIF orientation data)
CODMAC	Committee on Data Management, Archiving, and Computing
CRC	Cyclic Redundancy Check
CU	University of Colorado (Boulder, CO)
DAP	Data Analysis Product
DDR	Derived Data Record
DMAS	Data Management and Storage
DPF	Data Processing Facility
E&PO	Education and Public Outreach
EDR	Experiment Data Record
EUV	Extreme Ultraviolet; also used for the EUV Monitor, part of LPW (SSL)
FEI	File Exchange Interface
FOV	Field of View
FTP	File Transfer Protocol
GB	Gigabyte(s)
GSFC	Goddard Space Flight Center (Greenbelt, MD)
HK	Housekeeping
HTML	Hypertext Markup Language
ICD	Interface Control Document
IM	Information Model
ISO	International Standards Organization
ITF	Instrument Team Facility

Abbreviation	Meaning
IUVS	Imaging Ultraviolet Spectrograph (LASP)
JPL	Jet Propulsion Laboratory (Pasadena, CA)
LASP	Laboratory for Atmosphere and Space Physics (CU)
LID	Logical Identifier
LIDVID	Versioned Logical Identifier
LPW	Langmuir Probe and Waves instrument (SSL)
MAG	Magnetometer instrument (GSFC)
MAVEN	Mars Atmosphere and Volatile Evolution
MB	Megabyte(s)
MD5	Message-Digest Algorithm 5
MOI	Mars Orbit Insertion
MOS	Mission Operations System
MSA	Mission Support Area
NAIF	Navigation and Ancillary Information Facility (JPL)
NASA	National Aeronautics and Space Administration
NGIMS	Neutral Gas and Ion Mass Spectrometer (GSFC)
NMSU	New Mexico State University (Las Cruces, NM)
NSSDC	National Space Science Data Center (GSFC)
PCK	Planetary Constants Kernel (NAIF)
PDS	Planetary Data System
PDS4	Planetary Data System Version 4
PF	Particles and Fields (instruments)
PPI	PDS Planetary Plasma Interactions Node (UCLA)
RS	Remote Sensing (instruments)
SCET	Spacecraft Event Time
SDC	Science Data Center (LASP)
SCLK	Spacecraft Clock
SEP	Solar Energetic Particle instrument (SSL)
SIS	Software Interface Specification
SOC	Science Operations Center (LASP)

Abbreviation	Meaning
SPE	Solar Particle Event
SPICE	Spacecraft, Planet, Instrument, C-matrix, and Events (NAIF data format)
SPK	Spacecraft and Planetary ephemeris Kernel (NAIF)
SSL	Space Sciences Laboratory (UCB)
STATIC	Supra-Thermal And Thermal Ion Composition instrument (SSL)
SWEA	Solar Wind Electron Analyzer (SSL)
SWIA	Solar Wind Ion Analyzer (SSL)
TBC	To Be Confirmed
TBD	To Be Determined
UCB	University of California, Berkeley
UCLA	University of California, Los Angeles
URN	Uniform Resource Name
UV	Ultraviolet
XML	eXtensible Markup Language

1.5 Glossary

Archive – A place in which public records or historical documents are preserved; also the material preserved – often used in plural. The term may be capitalized when referring to all of PDS holdings – the PDS Archive.

Basic Product – The simplest product in PDS4; one or more data objects (and their description objects), which constitute (typically) a single observation, document, etc. The only PDS4 products that are *not* basic products are collection and bundle products.

Bundle Product – A list of related collections. For example, a bundle could list a collection of raw data obtained by an instrument during its mission lifetime, a collection of the calibration products associated with the instrument, and a collection of all documentation relevant to the first two collections.

Class – The set of attributes (including a name and identifier) which describes an item defined in the PDS Information Model. A class is generic – a template from which individual items may be constructed.

Collection Product – A list of closely related basic products of a single type (e.g. observational data, browse, documents, etc.). A collection is itself a product (because it is simply a list, with its label), but it is not a *basic* product.

Data Object – A generic term for an object that is described by a description object. Data objects include both digital and non-digital objects.

Description Object – An object that describes another object. As appropriate, it will have structural and descriptive components. In PDS4 a ‘description object’ is a digital object – a string of bits with a predefined structure.

Digital Object – An object which consists of real electronically stored (digital) data.

Identifier – A unique character string by which a product, object, or other entity may be identified and located. Identifiers can be global, in which case they are unique across all of PDS (and its federation partners). A local identifier must be unique within a label.

Label – The aggregation of one or more description objects such that the aggregation describes a single PDS product. In the PDS4 implementation, labels are constructed using XML.

Logical Identifier (LID) – An identifier which identifies the set of all versions of a product.

Versioned Logical Identifier (LIDVID) – The concatenation of a logical identifier with a version identifier, providing a unique identifier for each version of product.

Manifest - A list of contents.

Metadata – Data about data – for example, a ‘description object’ contains information (metadata) about an ‘object.’

Non-Digital Object – An object which does not consist of digital data. Non-digital objects include both physical objects like instruments, spacecraft, and planets, and non-physical objects like missions, and institutions. Non-digital objects are labeled in PDS in order to define a unique identifier (LID) by which they may be referenced across the system.

Object – A single instance of a class defined in the PDS Information Model.

PDS Information Model – The set of rules governing the structure and content of PDS metadata. While the Information Model (IM) has been implemented in XML for PDS4, the model itself is implementation independent.

Product – One or more tagged objects (digital, non-digital, or both) grouped together and having a single PDS-unique identifier. In the PDS4 implementation, the descriptions are combined into a single XML label. Although it may be possible to locate individual objects within PDS (and to find specific bit strings within digital objects), PDS4 defines ‘products’ to be the smallest granular unit of addressable data within its complete holdings.

Tagged Object – An entity categorized by the PDS Information Model, and described by a PDS label.

Registry – A database that provides services for sharing content and metadata.

Repository – A place, room, or container where something is deposited or stored (often for safety).

XML – eXtensible Markup Language.

XML schema – The definition of an XML document, specifying required and optional XML elements, their order, and parent-child relationships.

1.6 MAVEN Mission Overview

The MAVEN mission is scheduled to launch on an Atlas V between November 18 and December 7, 2013. After a ten-month ballistic cruise phase, Mars orbit insertion will occur on or after September 22, 2014. Following a 5-week transition phase, the spacecraft will orbit Mars at a 75° inclination, with a 4.5 hour period and periapsis altitude of 140-170 km (density corridor of 0.05-0.15 kg/km³). Over a one-Earth-year period, periapsis will precess over a wide range of latitude and local time, while MAVEN obtains detailed measurements of the upper atmosphere, ionosphere, planetary corona, solar wind, interplanetary/Mars magnetic fields, solar EUV and solar energetic particles, thus defining the interactions between the Sun and Mars. MAVEN will explore down to the homopause during a series of five 5-day “deep dip” campaigns for which periapsis will be lowered to an atmospheric density of 2 kg/km³ (~125 km altitude) in order to sample the transition from the collisional lower atmosphere to the collisionless upper atmosphere. These five campaigns will be interspersed though the mission to sample the subsolar region, the dawn and dusk terminators, the anti-solar region, and the north pole.

1.6.1 Mission Objectives

The primary science objectives of the MAVEN project will be to provide a comprehensive picture of the present state of the upper atmosphere and ionosphere of Mars and the processes controlling them and to determine how loss of volatiles to outer space in the present epoch varies with changing solar conditions. Knowing how these processes respond to the Sun’s energy inputs will enable scientists, for the first time, to reliably project processes backward in time to study atmosphere and volatile evolution. MAVEN will deliver definitive answers to high-priority science questions about atmospheric loss (including water) to space that will greatly enhance our understanding of the climate history of Mars. Measurements made by MAVEN will allow us to determine the role that escape to space has played in the evolution of the Mars atmosphere, an essential component of the quest to “follow the water” on Mars. MAVEN will accomplish this by achieving science objectives that answer three key science questions:

- What is the current state of the upper atmosphere and what processes control it?
- What is the escape rate at the present epoch and how does it relate to the controlling processes?
- What has the total loss to space been through time?

MAVEN will achieve these objectives by measuring the structure, composition, and variability of the Martian upper atmosphere, and it will separate the roles of different loss mechanisms for both neutrals and ions. MAVEN will sample all relevant regions of the Martian atmosphere/ionosphere system—from the termination of the well-mixed portion of the atmosphere (the “homopause”), through the diffusive region and main ionosphere layer, up into the collisionless exosphere, and through the magnetosphere and into the solar wind and downstream tail of the planet where loss of neutrals and ionization occurs to space—at all relevant latitudes and local solar times. To allow a meaningful projection of escape back in time, measurements of escaping species will be made simultaneously with measurements of the energy drivers and the controlling magnetic field over a range of solar conditions. Together with measurements of the isotope ratios of major species, which constrain the net loss to space over time, this approach will allow thorough identification of the role that atmospheric escape plays today and to extrapolate to earlier epochs.

1.6.2 Payload

MAVEN will use the following science instruments to measure the Martian upper atmospheric and ionospheric properties, the magnetic field environment, the solar wind, and solar radiation and particle inputs:

- NGIMS Package:
 - Neutral Gas and Ion Mass Spectrometer (NGIMS) measures the composition, isotope ratios, and scale heights of thermal ions and neutrals.
- RS Package:
 - Imaging Ultraviolet Spectrograph (IUVS) remotely measures UV spectra in four modes: limb scans, planetary mapping, coronal mapping and stellar occultations. These measurements provide the global composition, isotope ratios, and structure of the upper atmosphere, ionosphere, and corona.
- PF Package:
 - Supra-Thermal and Thermal Ion Composition (STATIC) instrument measures the velocity distributions and mass composition of thermal and suprathermal ions from below escape energy to pickup ion energies.
 - Solar Energetic Particle (SEP) instrument measures the energy spectrum and angular distribution of solar energetic electrons (30 keV – 1 MeV) and ions (30 keV – 12 MeV).
 - Solar Wind Ion Analyzer (SWIA) measures solar wind and magnetosheath ion density, temperature, and bulk flow velocity. These measurements are used to determine the charge exchange rate and the solar wind dynamic pressure.
 - Solar Wind Electron Analyzer (SWEA) measures energy and angular distributions of 5 eV to 5 keV solar wind, magnetosheath, and auroral electrons, as well as ionospheric photoelectrons. These measurements are used to constrain the plasma environment, magnetic field topology and electron impact ionization rate.
 - Langmuir Probe and Waves (LPW) instrument measures the electron density and temperature and electric field in the Mars environment. The instrument includes

- an EUV Monitor that measures the EUV input into Mars atmosphere in three broadband energy channels.
- Magnetometer (MAG) measures the vector magnetic field in all regions traversed by MAVEN in its orbit.

1.7 SIS Content Overview

Section 2 describes the EUV instrument. Section 3 gives an overview of data organization and data flow. Section 4 describes data archive generation, delivery, and validation. Section 5 describes the archive structure and archive production responsibilities. Section 6 describes the file formats used in the archive, including the data product record structures. Individuals involved with generating the archive volumes are listed in Appendix A. Appendix B contains a description of the MAVEN science data file naming conventions. Appendix C, Appendix D, and Appendix E contain sample PDS product labels. Appendix F describes EUV archive product PDS deliveries formats and conventions.

1.8 Scope of this document

The specifications in this SIS apply to all EUV products submitted for archive to the Planetary Data System (PDS), for all phases of the MAVEN mission. This document includes descriptions of archive products that are produced by both the EUV team and by PDS. Note that the EUV is part of the LPW instrument. As such, the EUV raw data is part of the LPW data stream. The LPW SIS describes the raw data and L0 archival for the LPW-EUV data combined. This document only describes the higher level EUV specific data products to be archived at the PDS.

1.9 Applicable Documents

- [1] Planetary Data System Data Provider's Handbook, TBD.
- [2] Planetary Data System Standards Reference, Version 1.2.0, March 27, 2014.
- [3] Planetary Science Data Dictionary Document, TBD.
- [4] Planetary Data System (PDS) PDS4 Information Model Specification, Version 1.1.0.1.
- [5] Mars Atmosphere and Volatile Evolution (MAVEN) Science Data Management Plan, Rev. C, doc. no.MAVEN-SOPS-PLAN-0068.
- [6] Archive of MAVEN CDF in PDS4, Version 3, T. King and J. Mafi, March 13, 2014.

1.10 Audience

This document serves both as a SIS and Interface Control Document (ICD). It describes both the archiving procedure and responsibilities, and data archive conventions and format. It is designed to be used both by the instrument teams in generating the archive, and by those wishing to understand the format and content of the EUV PDS data product archive collection. Typically, these individuals would include scientists, data analysts, and software engineers.

2 EUV Instrument Description

The EUV monitor is designed to measure the solar irradiance in three broad bands in the soft x-ray and extreme ultraviolet wavelength range. It consists of three filter radiometers that each have a limiting aperture, bandpass limiting filter, silicon photodiode detector, and an electrometer to measure the current in the detector. A fourth detector-electrometer combination that is blocked from receiving any light input is used as a “dark” detector to monitor changes in the thermal and radiation induced background signals. A temperature diode is also included in the EUV instrument. There is also a mechanism to place or remove additional fused silica windows in front of the three science apertures. These filters block the EUV and X-ray sunlight, but still allow longer wavelength light (primarily visible) through into the radiometers. This allows for a measurement of the out-of-band contribution to the signals from the science channels. Figure 1 shows the block diagram as context for how the EUV monitor is incorporated into the LPW-EUV instrument. The EUV instrument and its calibration are described in more detail in *Eparvier, et al. [2014]*.

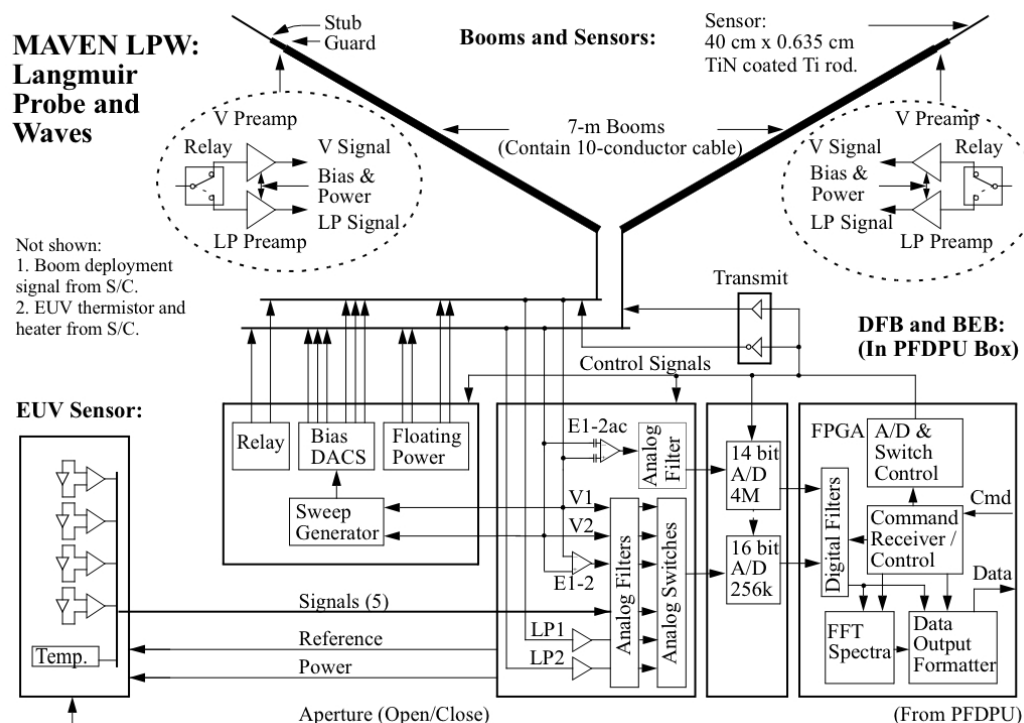


Figure 1: Block diagram of LPW instrument (including EUV)

2.1 Science Objectives

The science objective of the EUV monitor is to provide the solar extreme ultraviolet irradiance of aeronomical importance at Mars for the MAVEN mission. Through a combination of

measurements (on MAVEN and in Earth orbit) and empirical proxy models, the EUV monitor produces the spectral irradiance from 0-194 nm in 1-nm wavelength bins at a time cadence of 1-minute (L3 product). The EUV measurements (L2 product) on MAVEN consist of three bands (0.1-7 nm, 17-22 nm, and 121-122 nm) at a cadence of 1-second. A modified version of the Flare Irradiance Spectral Model (FISM) uses the EUV monitor measurements as proxy inputs, along with other solar proxies interpolated in time and space from Earth to Mars) to generate the full spectral irradiance.

2.2 Operational Modes

The EUV monitor has a single mode. When the LPW is powered ON, the EUV detectors and temperature monitor are producing data at a nominal cadence of 1-sec (this is configurable, but only in rare cases will it be changed). When the LPW is powered OFF, no EUV data is produced. Within the power ON mode, there are different possible states that affect the science usefulness of the data from the EUV. If the instrument boresight is pointed at the Sun, then the EUV is able to take solar measurements. If the EUV is not pointed at the Sun, then the data is considered “dark” data and is useful for detector noise and background measurements, but not for solar observations.

2.3 Ground Calibration

The calibration of the electronics for the EUV monitor was performed at the University of Colorado’s Laboratory for Atmospheric and Space Physics. The radiometric calibration was performed at the National Institute of Standards and Technology (NIST) Synchrotron Ultraviolet Radiation Facility (SURF) III in Gaithersburg, MD. The EUV monitor was calibrated over a range of field of view angles. The EUV instrument and its calibration are described in more detail in *Eparvier, et al. [2014]*.

2.4 Inflight Calibration

During cruise phase while on the way to Mars, the EUV observed the same face of the Sun as several Earth-orbit based solar EUV irradiance instruments (SDO-EVE, TIMED-SEE, and SORCE). This provided a benchmark for any changes in radiometric performance between NIST-SURF calibrations and launch. A cruciform maneuver, moving the Sun through the extremes of the EUV field of view, was performed to check for boresight shifts and changes in the field of view response. This maneuver, plus a smaller raster scan of the center of the field of view will be repeated during the MAVEN transition phase and once again before the end of the primary mission. A SPICE kernel for the EUV boresight relative to the spacecraft pointing is produced from the cruciform maneuver data. Weekly visible light contribution measurements will be made during the science phase of the mission utilizing the EUV aperture mechanism. Dark data through the cruise phase and serendipitous dark data (during off-pointing from the Sun) in science phase will be used to track changes in the relationship between the dark channel and the detector noise and background signal in the science channels.

3 Data Overview

This section provides a high level description of archive organization under the PDS4 Information Model (IM) as well as the flow of the data from the spacecraft through delivery to PDS. Unless specified elsewhere in this document, the MAVEN EUV archive conforms with version 1.1.0.1 of the PDS4 IM [4] and version 1.0 of the MAVEN mission schema. A list of the XML Schema and Schematron documents associated with this archive are provided in Table 5 below.

Table 5: MAVEN EUV Archive Schema and Schematron

XML Document	Steward	Product LID
PDS Master Schema, v. 1.1.0.1	PDS	urn:nasa:pds:system_bundle:xml_schema:pds-xml_schema
PDS Master Schematron, v. 1.1.0.1	PDS	urn:nasa:pds:system_bundle:xml_schema:pds-xml_schema
MAVEN Mission Schema, v. 1.0	MAVEN	
MAVEN Mission Schematron, v. 1.0	MAVEN	

3.1 Data Processing Levels

A number of different systems may be used to describe data processing level. This document refers to data by their PDS4 processing level. Table 6 provides a description of these levels along with the equivalent designations used in other systems.

Table 6: Data processing level designations

PDS4 processing level	PDS4 processing level description	MAVEN Processing Level	CODMAC Level	NASA Level
Raw	Original data from an instrument. If compression, reformatting, packetization, or other translation has been applied to facilitate data transmission or storage, those processes are reversed so that the archived data are in a PDS approved archive format.	0	2	1A
Reduced	Data that have been processed beyond the raw stage but which are not yet entirely independent of the instrument.	1	2	1A
Calibrated	Data converted to physical units entirely independent of the instrument.	2	3	1B

PDS4 processing level	PDS4 processing level description	MAVEN Processing Level	CODMAC Level	NASA Level
Derived	Results that have been distilled from one or more calibrated data products (for example, maps, gravity or magnetic fields, or ring particle size distributions). Supplementary data, such as calibration tables or tables of viewing geometry, used to interpret observational data should also be classified as ‘derived’ data if not easily matched to one of the other three categories.	3+	4+	2+

3.2 Products

A PDS product consists of one or more digital and/or non-digital objects, and an accompanying PDS label file. Labeled digital objects are data products (i.e. electronically stored files). Labeled non-digital objects are physical and conceptual entities which have been described by a PDS label. PDS labels provide identification and description information for labeled objects. The PDS label defines a Logical Identifier (LID) by which any PDS labeled product is referenced throughout the system. In PDS4 labels are XML formatted ASCII files. More information on the formatting of PDS labels is provided in Section 6.3. More information on the usage of LIDs and the formation of MAVEN LIDs is provided in Section 5.1.

3.3 Product Organization

The highest level of organization for PDS archive is the bundle. A bundle is a list of one or more related collection products which may be of different types. A collection is a list of one or more related basic products which are all of the same type. Figure 2 below illustrates these relationships.

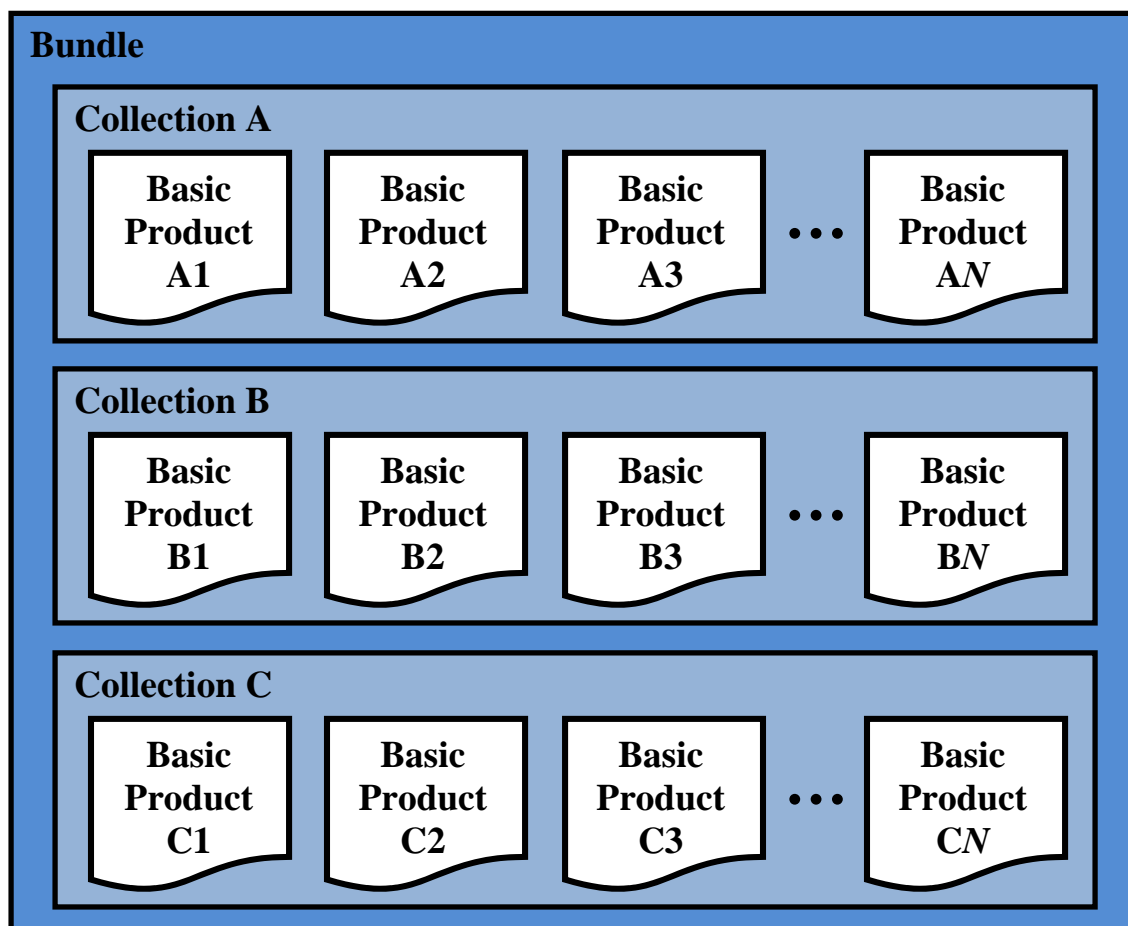


Figure 2: A graphical depiction of the relationship among bundles, collections, and basic products.

Bundles and collections are logical structures, not necessarily tied to any physical directory structure or organization. Bundle and collection membership is established by a member inventory list. Bundle member inventory lists are provided in the bundle product labels themselves. Collection member inventory lists are provided in separate collection inventory table files. Sample bundle and collection labels are provided in Appendix C and Appendix D, respectively.

3.3.1 Collection and Basic Product Types

Collections are limited to a single type of basic products. The types of archive collections that are defined in PDS4 are listed in Table 7.

Table 7: Collection product types

Collection Type	Description
Browse	Contains products intended for data characterization, search, and viewing, and not for

	scientific research or publication.
Calibration	Contains data and files necessary for the calibration of basic products.
Context	Contains products which provide for the unique identification of objects which form the context for scientific observations (<i>e.g.</i> spacecraft, observatories, instruments, targets, etc.).
Document	Contains electronic document products which are part of the PDS Archive.
Data	Contains scientific data products intended for research and publication.
SPICE	Contains NAIF SPICE kernels.
XML_Schema	Contains XML schemas and related products which may be used for generating and validating PDS4 labels.

3.4 Bundle Products

The EUV data archive is organized into 5 bundles, although two of these bundles are actually PF and LPW bundles (described in the LPW SIS). A description of each bundle is provided in Table 8. A more detailed description of the contents and format of each of the three EUV specific bundles controlled by the EUV ITF is provided in Section 5.2.

Table 8: EUV Bundles

Bundle Logical Identifier	PDS4 Reduction Level	Description	Data Provider
TBD	Raw	PF packets – all packets together, describe in separate document (LPW SIS) . This is the Level 0 data.	SDC
urn:nasa:pds:maven.lpw.raw	Raw	LPW packets in separate CDF files. This is the Level 0b data. (See LPW SIS for description)	TBD
urn:nasa:pds:maven.euv.calibrated	Calibrated	Fully calibrated: solar irradiances in in three instrument bandpasses. Provided by the EUV team in CDF files. This is the EUV Level 2 Data Product.	ITF
urn:nasa:pds:maven.euv.modelled	Modelled	Modelled full EUV spectra based on EUV and other measurements (per minute and one daily average at 1-nm resolution). Provided by the EUV team in CDF files. This is the EUV Level 3 Data Product.	ITF
urn:nasa:pds:maven.euv	N/A	EUV Documentation	ITF

3.5 Data Flow

This section describes only those portions of the MAVEN data flow that are directly connected to archiving. A full description of MAVEN data flow is provided in the MAVEN Science Data Management Plan [5]. A graphical representation of the full MAVEN data flow is provided in Figure 3 below.

Reduced (MAVEN level 1) data will be produced by RS and NGIMS as an intermediate processing product, and are delivered to the SDC for archiving at the PDS, but will not be used by the MAVEN team.

All ITFs will produce calibrated products. Following an initial 2-month period at the beginning of the mapping phase, the ITFs will routinely deliver preliminary calibrated data products to the SDC for use by the entire MAVEN team within two weeks of ITF receipt of all data needed to generate those products. The SOC will maintain an active archive of all MAVEN science data, and will provide the MAVEN science team with direct access through the life of the MAVEN mission. After the end of the MAVEN project, PDS will be the sole long-term archive for all public MAVEN data.

Updates to calibrations, algorithms, and/or processing software are expected to occur regularly, resulting in appropriate production system updates followed by reprocessing of science data

products by ITFs for delivery to SDC. Systems at the SOC, ITFs and PDS are designed to handle these periodic version changes.

Data bundles intended for the archive are identified in Table 8.

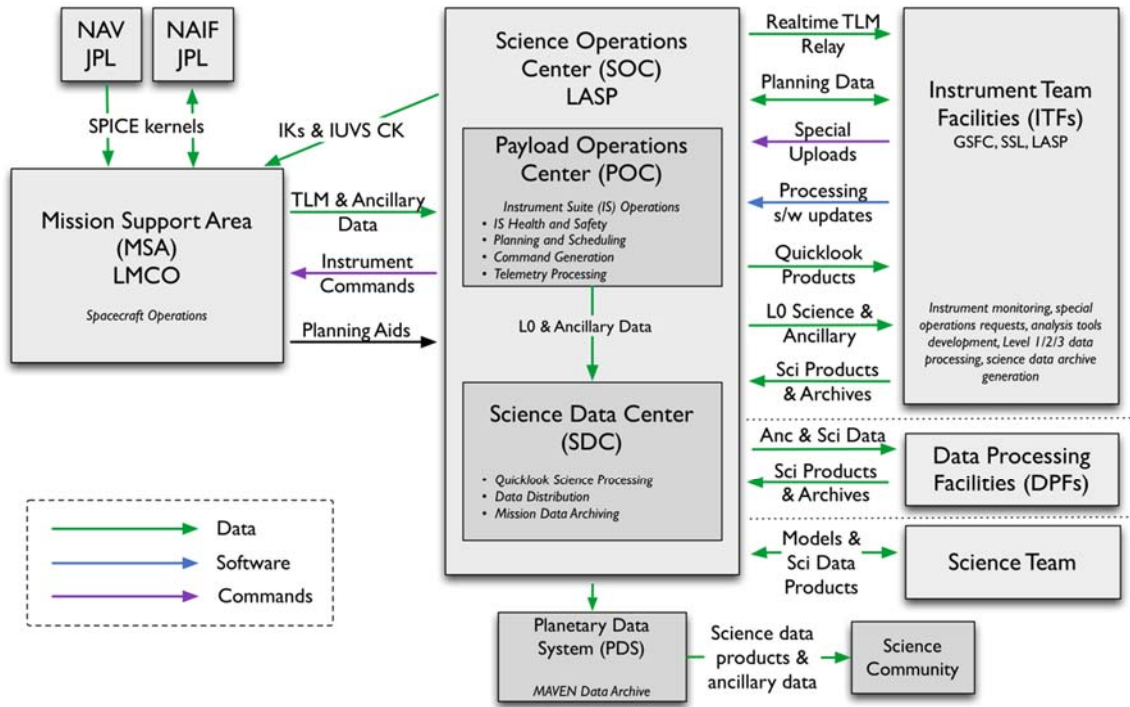


Figure 3: MAVEN Ground Data System responsibilities and data flow. Note that this figure includes portions of the MAVEN GDS which are not directly connected with archiving, and are therefore not described in Section 3.5 above.

4 Archive Generation

The EUV archive products are produced by the EUV instrument team in cooperation with the SDC, and with the support of the PDS, Planetary Plasma Interactions (PPI) Node at the University of California, Los Angeles (UCLA). The archive volume creation process described in this section sets out the roles and responsibilities of each of these groups. The assignment of tasks have been agreed upon by all parties. Archived data received by the PPI Node from the EUV team are made available to PDS users electronically as soon as practicable but no later two weeks after the delivery and validation of the data.

4.1 Data Processing and Production Pipeline

The following sections describe the process by which data products in each of the EUV specific bundles listed in *Table 8* are produced. The PF and LPW bundles also mentioned in that table are described in the LPW SIS.

4.1.1 Raw Data Production Pipeline

The LPW team uses a dedicated decomutator to extract the LPW packets from the MAVEN PF L-0 packets. The data from the individual instrument packets is then extracted and saved as separate CDF files for PDS archiving urn:nasa:pds:maven.lpw.raw. The decomutator software will be archived at PDS as a reference manual for the future in the Document bundle.

4.1.2 Calibrated Data Production Pipeline

The EUV team uses a dedicated decomutator to extract the EUV packets from the MAVEN PF L-0 packets. The raw EUV data is then calibrated with the calibration information derived from ground testing in the instrument constants routine provided in the Document bundle. The raw EUV can also be found in the L0b file urn:nasa:pds:maven.lpw.raw:euv.

After the individual packets are calibrated using the ground testing data from different packets it is merged together with ancillary data and evaluated to create the Level 2 and Level 3 science data products (urn:nasa:pds:maven.euv.calibrated and urn:nasa:pds:maven.euv.modelled respectively). This software is archived as documentation of the process in the Document bundle.

4.2 Data Validation

4.2.1 Instrument Team Validation

Since the quality of the EUV is sensitive to SC attitude and solar conditions, etc., the data will be evaluated by a scientist through overview plots and spot-checking. At interesting/active periods the production of the data can be manually optimized. The EUV team will use confidence flags to indicate when the SC attitude (or other reasons) degrades the instrument measure quality. The EUV data products will be compared with Earth-based measurements and models of solar

irradiance to determine if the EUV results at Mars are reasonable in both absolute value and relative variability.

4.2.2 MAVEN Science Team Validation

The calibrated and modeled files will be used by the MAVEN Science team. This will provide a second validation of the science data. The LPW team will use the EUV data to help determine the photocurrent contribution to their signals. The Remote Sensing (RS) team and various interdisciplinary scientists will use the EUV data as input to atmospheric and dayglow models to better understand their data and the atmospheric response to changes in various energy inputs. The use of EUV data in by these other team members will serve to partially validate the EUV data products.

4.2.3 PDS Peer Review

The PPI node will conduct a full peer review of all of the data types that the LPW team intends to archive. The review data will consist of fully formed bundles populated with candidate final versions of the data and other products and the associated metadata.

Table 9: MAVEN PDS review schedule

4.3 Date	4.4 Activity	4.5 Responsible Team
2014-Mar-24	Signed SIS deadline	ITF
2014-Apr-18	Sample data products due	ITF
2014-May to 2014-Aug	Preliminary PDS peer review (SIS, sample data files)	PDS
2015-Mar-02	Release #1: Data due to PDS	ITF/SDC
2015-Mar to 2015-Apr	Release #1: Data PDS peer review	PDS
2015-May-01	Release #1: Public release	PDS

Reviews will include a preliminary delivery of sample products for validation and comment by PDS PPI and Engineering node personnel. The data provider will then address the comments coming out of the preliminary review, and generate a full archive delivery to be used for the peer review.

Reviewers will include MAVEN Project and EUV team representatives, researchers from outside of the MAVEN project, and PDS personnel from the Engineering and PPI nodes. Reviewers will examine the sample data products to determine whether the data meet the stated science objectives of the instrument and the needs of the scientific community and to verify that the accompanying metadata are accurate and complete. The peer review committee will identify any liens on the data that must be resolved before the data can be ‘certified’ by PDS, a process by which data are made public as minor errors are corrected.

In addition to verifying the validity of the review data, this review will be used to verify that the data production pipeline by which the archive products are generated is robust. Additional deliveries made using this same pipeline will be validated at the PPI node, but will not require additional external review.

As expertise with the instrument and data develops the EUV team may decide that changes to the structure or content of its archive products are warranted. Any changes to the archive products or to the data production pipeline will require an additional round of review to verify that the revised products still meet the original scientific and archival requirements or whether those criteria have been appropriately modified. Whether subsequent reviews require external reviewers will be decided on a case-by-case basis and will depend upon the nature of the changes. A comprehensive record of modifications to the archive structure and content is kept in the Modification_History element of the collection and bundle products.

The instrument team and other researchers are encouraged to archive additional EUV products that cover specific observations or data-taking activities. The schedule and structure of any additional archives are not covered by this document and should be worked out with the PPI node.

4.6 Data Transfer Methods and Delivery Schedule

The SOC is responsible for delivering data products to the PDS for long-term archiving. While ITFs are primarily responsible for the design and generation of calibrated and derived data archives, the archival process is managed by the SOC. The SOC (in coordination with the ITFs) will also be primarily responsible for the design and generation of the raw data archive. The first PDS delivery will take place within 6 months of the start of science operations. Additional deliveries will occur every following 3 months and one final delivery will be made after the end of the mission. Science data are delivered to the PDS within 6 months of its collection. If it becomes necessary to reprocess data which have already been delivered to the archive, the ITFs will reprocess the data and deliver them to the SDC for inclusion in the next archive delivery. A summary of this schedule is provided in Table 10 below.

Table 10: Archive bundle delivery schedule for EUV specific bundles.

Bundle Logical Identifier	First Delivery to PDS	Delivery Schedule	Estimated Delivery Size
urn:nasa:pds:maven.euv.calibrated	Represent L2 data. No later	Every 3	

	than 6 months after the start of science operations	months	
urn:nasa:pds:maven.euv.modelled	Represent L3 data. 3 months after all input information is available TBR	Every 3 months	

Each delivery will comprise both data and ancillary data files organized into directory structures consistent with the archive design described in Section 5, and combined into a deliverable file(s) using file archive and compression software. When these files are unpacked at the PPI Node in the appropriate location, the constituent files will be organized into the archive structure.

Archive deliveries are made in the form of a “delivery package”. Delivery packages include all of the data being transferred along with a transfer manifest, which helps to identify all of the products included in the delivery, and a checksum manifest which helps to insure that integrity of the data is maintained through the delivery. The format of these files is described in Section 6.4.

Data are transferred electronically (using the *ssh* protocol) from the SOC to an agreed upon location within the PPI file system. PPI will provide the SOC a user account for this purpose. Each delivery package is made in the form of a compressed *tar* or *zip* archive. Only those files that have changed since the last delivery are included. The PPI operator will decompress the data, and verify that the archive is complete using the transfer and MD5 checksum manifests that were included in the delivery package. Archive delivery status will be tracked using a system defined by the PPI node.

Following receipt of a data delivery, PPI will reorganize the data into its PDS archive structure within its online data system. PPI will also update any of the required files associated with a PDS archive as necessitated by the data reorganization. Newly delivered data are made available publicly through the PPI online system once accompanying labels and other documentation have been validated. It is anticipated that this validation process will require no more than fourteen working days from receipt of the data by PPI. However, the first few data deliveries may require more time for the PPI Node to process before the data are made publicly available.

The MAVEN prime mission begins approximately 5 weeks following MOI and lasts for 1 Earth-year. Table 10 shows the data delivery schedule for the entire mission.

4.7 Data Product and Archive Volume Size Estimates

EUV data products consist of files that span 24 hours, breaking at 0h UTC SCET. The break point depends on the time tag of the instrument packets, not when the individual measurement was made. The combined EUV Level 2 (calibrated) and Level 3 (modelled) data products are expected to be ~7 MB per week.

4.8 Data Validation

Routine data deliveries to the PDS are validated at the PPI node to ensure that the delivery meets PDS standards, and that the data conform to the SIS as approved in the peer review. As long as there are no changes to the data product formats, or data production pipeline, no additional external review will be conducted.

4.9 Backups and duplicates

The PPI Node keeps three copies of each archive product. One copy is the primary online archive copy, another is an onsite backup copy, and the final copy is an off-site backup copy. Once the archive products are fully validated and approved for inclusion in the archive, copies of the products are sent to the National Space Science Data Center (NSSDC) for long-term archive in a NASA-approved deep-storage facility. The PPI Node may maintain additional copies of the archive products, either on or off-site as deemed necessary. The process for the dissemination and preservation of EUV data is illustrated in Figure 4.

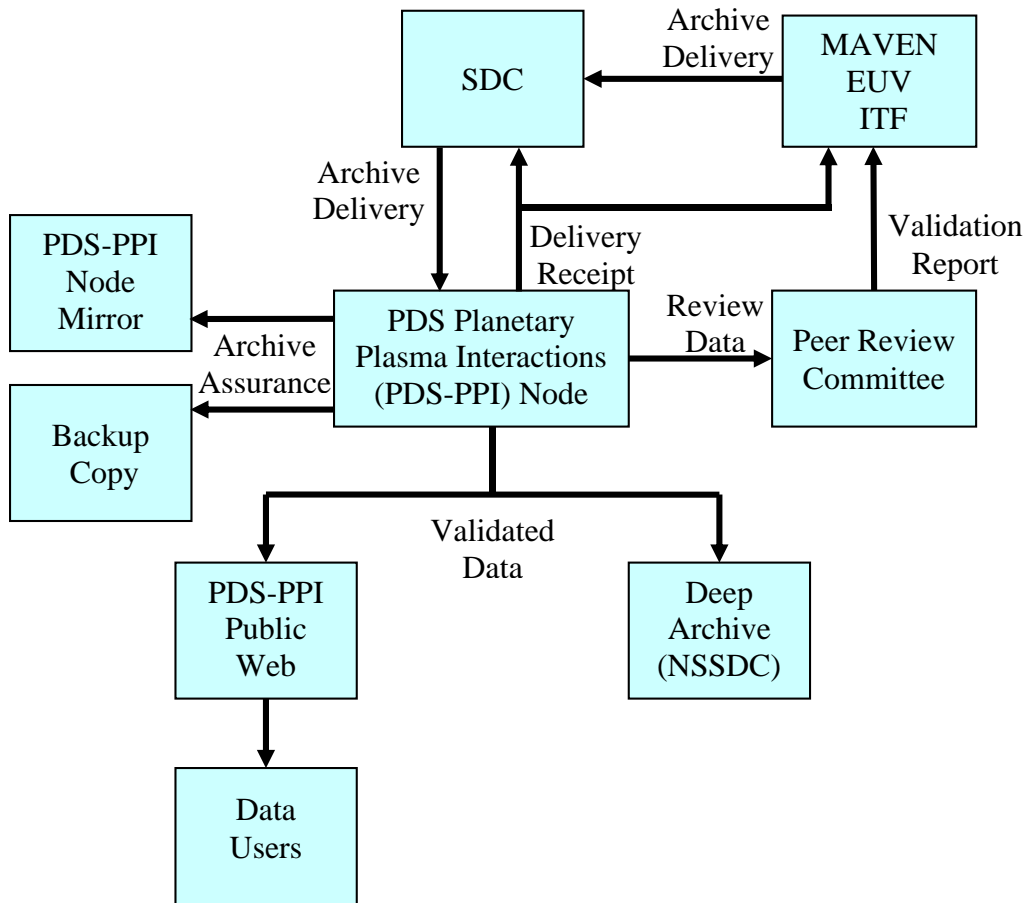


Figure 4: Duplication and dissemination of EUV archive products at PDS/PPI.

5 Archive organization and naming

This section describes the basic organization of an EUV bundle, and the naming conventions used for the product logical identifiers, and bundle, collection, and basic product filenames.

5.1 Logical Identifiers

Every product in PDS is assigned an identifier which allows it to be uniquely identified across the system. This identifier is referred to as a Logical Identifier or LID. A LIDVID (Versioned Logical Identifier) includes product version information, and allows different versions of a specific product to be referenced uniquely. A product's LID and VID are defined as separate attributes in the product label. LIDs and VIDs are assigned by the entity generating the labels and are formed according to the conventions described in sections 5.1.1 and 5.1.2 below. The uniqueness of a product's LIDVID may be verified using the PDS Registry and Harvest tools.

5.1.1 LID Formation

LIDs take the form of a Uniform Resource Name (URN). LIDs are restricted to ASCII lower case letters, digits, dash, underscore, and period. Colons are also used, but only to separate prescribed components of the LID. Within one of these prescribed components dash, underscore, or period are used as separators. LIDs are limited in length to 255 characters.

MAVEN EUV LIDs are formed according to the following conventions:

- Bundle LIDs are formed by appending a bundle specific ID to the MAVEN EUV base ID:

urn:nasa:pds:maven.euv.<bundle ID>

Since all PDS bundle LIDs are constructed this way, the combination of maven.euv.bundle must be unique across all products archived with the PDS.

- Collection LIDs are formed by appending a collection specific ID to the collection's parent bundle LID:

urn:nasa:pds:maven.euv.<bundle ID>:<collection ID>

Since the collection LID is based on the bundle LID, which is unique across PDS, the only additional condition is that the collection ID must be unique across the bundle. Collection IDs correspond to the collection type (e.g. "browse", "data", "document", etc.). Additional descriptive information may be appended to the collection type (e.g. "data-raw", "data-calibrated", etc.) to insure that multiple collections of the same type within a single bundle have unique LIDs.

- Basic product LIDs are formed by appending a product specific ID to the product's parent collection LID:

urn:nasa:pds:maven.euv.<bundle ID>:<collection ID>:<product ID>

Since the product LID is based on the collection LID, which is unique across PDS, the only additional condition is that the product ID must be unique across the collection.

A list of EUV bundle LIDs is provided in Table 8. (Note that the table includes two LPW bundles that are described in the separate LPW SIS.) Collection LIDs are listed in Table 11 and Table 12..

5.1.2 VID Formation

Product version ID's consist of major and minor components separated by a "." (M.n). Both components of the VID are integer values. The major component is initialized to a value of "1", and the minor component is initialized to a value of "0". The minor component resets to "0" when the major component is incremented.

All produced CDF-files from the EUV instrument will contain one version number and one revision number in the file name. The version number will reflect if the structure of the CDF-file has changed. The revision number will reflect if the EUV team has reprocessed the data that already were submitted to the SOC.

5.2 EUV Archive Contents

The EUV archive from the EUV team includes the 3 bundles listed in Table 8 that are specific to the EUV monitor. The following sections describe the contents of each of these bundles in greater detail. See the LPW SIS for the description of the raw data bundles that contain the full PF and LPW raw data including the EUV raw data.

5.2.1 EUV calibrated

This bundle of products is science quality data that directly is produced by the EUV instrument. It comprises the Level 2 data product for the EUV instrument. In the production process information such as spacecraft attitude has been considered. There is only one collection/product in the EUV calibrated bundle. This collection/product is described briefly in Table 11. The following sections describe the products in more detail. The production and validation is of EUV ITF's responsibility.

Table 11: EUV calibrated collection/product

Collection LID	Description
euv.calibrated:data.bands	These are the L2 calibrated irradiances in each of the three instrument bandpasses (Watts/m ²)

5.2.1.1 euv.calibrated:data.bands

The product is the solar irradiance in the three instrument bandpasses. The raw data numbers (DN) from the three EUV science channels are corrected for background signal (using a scaling of the dark channel) and for out-of-band signal (using contributions measured during periodic window-closed calibration observations). Then the resultant corrected signals are multiplied by a responsivity factor for each

channel that is determined from ground calibrations, converting the DN to Watts/m² in each channel's bandpass. Irradiances are produced for each 1-second measurement in the L0 raw data in which the spacecraft attitude and the position of the EUV aperture mechanism allow for a solar measurement. In addition, a measurement uncertainty and a total combined uncertainty for each irradiance is provided. If there is no good measurement available (such as when the EUV aperture is closed, or the EUV is pointed off the Sun), such times are completely removed from the time series. For each measurement a quality flag is also provided ranging from the integer of 0 to 100 where 0 represent no confidence at all while 100 represent a good confidence.

The EUV ITF will produce this products, with one file per UT day, with the naming convention `mvn_euv_l2_bands_<yyyy><mm><dd>_v<xx>_r<yy>.cdf`

5.2.2 LPW modelled

The EUV modelled bundles comprise the Level 3 data product for the EUV instrument. Information from the EUV calibrated data products (Level 2) and from Earth-based solar indices and measurements as input to a solar irradiance proxy model which generates solar irradiance spectra in 1-nm bins from 0-190 nm. The proxy model is the Flare Irradiance Spectral Model – Planetary (FISM-P) and is described in *Eparvier, et al. [2014]*. Explanation of the modelled collections is given in Table 12 and the modelled products are presented in Table 13. The EUV ITF is responsible for the production and verification of these products.

Table 12: EUV modelled collections

Collection LID	Description
euv.modelled:data.daily	These are data products are the daily averaged modelled irradiance spectra.
euv.modelled:data.minute	These are data products are the minute averaged modelled irradiance spectra.

Table 13: EUV modelled products

Collection LID	Description
euv.modelled:data.daily.spectra	Daily averaged irradiance spectrum (W/m ² /nm) from the FISM-P model using the EUV calibrated band irradiance and interpolated Earth-based indices as proxies. There are 190 elements in each spectrum. There is one spectrum per day. The uncertainty (in %) and central wavelength (in nm) for each element is also provided.
euv.modelled:data.minute.spectra	Minute averaged irradiance spectrum (W/m ² /nm) from the FISM-P model using the EUV calibrated band irradiance and interpolated Earth-based indices as proxies. There are 190 elements in each spectrum and one spectrum for each minute in the day when the EUV instrument is making valid solar measurements. The uncertainty (in %) and central wavelength (in nm) for each element is also provided.

5.2.2.1 euv.modelled:data.daily.spectra

When the EUV instrument is making valid solar observations (EUV is pointed at the Sun and aperture mechanism in the OPEN position) then the EUV calibrated bands product can be used as proxies in the FISM-P model along with properly time and location interpolated Earth-based solar indices. The EUV bands product and the Earth-based proxies are averaged over the day and the FISM-P model is run in the daily mode to produce an irradiance spectrum. The daily spectra product is the output of the FISM-P model and is Watts/m²/nm for each of the 1-nm bins from 0-190 nm.

The FISM-P daily model provides an uncertainty for the irradiance spectrum. The daily uncertainty (in %) is provided for each of the 1-nm bins in the daily spectra product. This uncertainty is currently static but is repeated every day for completeness. It will be updated when newer versions of the FISM-P model and the modelled daily spectra products are released.

The wavelength (in nm) for the center of each of the 1-nm bins in the daily spectra product is also included. This wavelength scale is currently static but is repeated every day for completeness.

The EUV ITF will produce this products, with one file per UT day, with the naming convention `mvn_euv_l3_daily_<yyyy><mm><dd>_v<xx>_r<yy>.cdf`

5.2.2.2 euv.modelled:data.minute.spectra

When the EUV instrument is making valid solar observations (EUV is pointed at the Sun and aperture mechanism in the OPEN position) then the EUV calibrated bands product can be used as proxies in the FISM-P model along with properly time and location interpolated Earth-based solar indices. The EUV bands product and the Earth-based proxies are averaged over each minute of the day corresponding to valid EUV solar measurements and the FISM-P model is run in the minutely mode to produce irradiance spectra for that minute. The minute spectra product is the output of the FISM-P model and is Watts/m²/nm for each of the 1-nm bins from 0-190 nm. There are 1440 spectra in each minute spectra file, one for each minute of the day. For minutes where EUV data is not available, or not of high enough quality to make the modelled product, the spectra for those minutes are filled with -1 in each wavelength bin.

The FISM-P minutely model provides an uncertainty for the irradiance spectrum (in %) for each of the 1-nm bins in the minute spectra product. This uncertainty is currently static but is repeated every day for completeness, only one uncertainty spectrum is produced each day. It will be updated when newer versions of the FISM-P model and the modelled minute spectra products are released.

The wavelength (in nm) for the center of each of the 1-nm bins in the minute spectra product is also included. This wavelength scale is currently static but is repeated every day for completeness. Only one wavelength scale is included for each day.

The EUV ITF will produce this products, with one file per UT day, with the naming convention `mvn_euv_l3_minute <yyyy><mm><dd>_v<xx>_r<yy>.cdf`

5.2.3 EUV documentation

The information of the archived data is presented in this archived SIS document. Additional documents archived are the production software algorithm. The software algorithm is commented as the documentation. The archived products are presented in Table 14. Other documentation important to EUV is presented in Table 15.

Table 14: Documentation collections

Collection LID	Description
SIS	This document
Process	The IDL programs in ASCII files and calibration files

Table 15: Key Documentation associated with EUV

Document Name	LID	Responsibility
MAVEN Science Data Management Plan	urn:nasa:pds:maven:document:sdmp	MAVEN Project
MAVEN Mission Description	urn:nasa:pds:maven:document:mission.description	MAVEN Project
MAVEN Spacecraft Description	urn:nasa:pds:maven:document:spacecraft.description	MAVEN Project
MAVEN EUV Archive SIS	urn:nasa:pds:maven:document.euv:sis	EUV Team
EUV Software Description	urn:nasa:pds:maven:document.euv:process	EUV Team

MAVEN Science Data Management Plan – describes the data requirements for the MAVEN mission and the plan by which the MAVEN data system will meet those requirements

MAVEN Mission Description – describes the MAVEN mission.

MAVEN Spacecraft Description – describes the MAVEN spacecraft.

MAVEN EUV Archive SIS – describes the format and content of the EUV PDS data archive, including descriptions of the data products and associated metadata, and the archive format, content, and generation pipeline (this document)

EUV Software Description – the commented software describes how the data is processed.

The commented IDL software provides information how the maven.euv.calibrated, and maven.euv.modelled products are generated. The calibration files used by the IDL software are also included. These are provided as a number of ascii files.

6 Archive product formats

Data that comprise the EUV archives are formatted in accordance with PDS specifications [see *Planetary Science Data Dictionary* [4], *PDS Data Provider's Handbook* [2], and *PDS Standards Reference* [3]. This section provides details on the formats used for each of the products included in the archive.

6.1 Data File Formats

This section describes the format and record structure of each of the data file types.

EUV data files will be archived with PDS as Common Data Format (CDF). In order to allow the archival CDF files to be described by PDS metadata a number of requirements have been agreed to between the EUV ITF and the PDS-PPI node. These requirements are detailed in the document *Archive of MAVEN CDF in PDS4* (T. King and J. Mafi, July 16, 2013). These CDF files will be the same one's used and distributed by the EUV ITF internally. The contents of the EUV CDF files are described in the tables below.

All CDF files have a set of Field Names populated as presented in Table 16 and Table 17. Each CDF file have one set of the Field Names, however all Field names are not populated for all products. The fix set of Field names is followed by time-arranged data that is presented in the following subsections.

Table 16: CDF specific information in the CDF header

No	Field Name	Type	Description
A1	Project	String	"MAVEN Project"
A2	Source_name	String	"MAVEN> Mars Atmosphere And Volatile Evolution Mission"
A3	Discipline	String	"Planetary Physics > Particles and Fields"
A4	Var_type	String	"Data"
A5	Data_type	String	"CAL> Calibrated" or "RAW> Raw"
A6	Descriptor	String	Varies, depending on CDF file
A7	Data_version	String	"Constant_ver #"
A8	PI_name	String	"Data Production PI: Francis G. Eparvier"
A9	PI_affiliation	String	"LASP University of Colorado"
A10	Text	String	Text: Description of data/instrument
A11	Instrument_type	String	"Gamma and X-rays".
A12	Mission_group	String	"MAVEN"
A13	Logical_File_ID	String	"Logical file ID" - not used
A14	Logical_source	String	"Logical Source" - not used
A15	Logical_source_description	String	"Logical Source Description" - not used
A16	Monoton	String	"INCREASE"
A17	Scalemin	Float	Scalemin: min of data.y

No	Field Name	Type	Description
A18	Scalemax	Float	Scalemin: max of data.y

Table 17: EUV Header information that can exist in each file. See the individual products which fields are used

No	Header Field Name	Type	Description
B1	generated_date	String	"Gives the date and time the data was processed and the CDF
B2	t_epoch	Double	What zero time the spacecraft clock is correlated too.
B3	Time_start	Double Array	The first data packet (TBR) presented with different clocks TBR
B4	Time_end	Double Array	The last data packet (TBR) presented with different clocks TBR
B5	Time_Field	String Array	Description of the different clocks used TBR
B6	SPICE_kernel_version	String	SPICE Kernel version
B7	SPICE_kernel_flag	String	If SPICe kernel was used
B8	Flag_info	String	Normally flag represent 'confidence level' if not stated differently. 0 no confidence at all. Can be used for aperture open/close etc.
B9	Flag_source	String	Contain information of what is considered when the flag is created (such as sc-attitude)
B10	L0_datafile	String	Gives the name of the L0 file used.
B11	cal_vers	String	Gives the calibration file version
B12	cal_y_const1	String	Fixed convert information from measured binary values to physical units, variables from ground testing and design
B13	cal_y_const2	String	Fixed convert information from measured binary values to physical units, variables from space testing
B14	cal_datafile	String	If one or more calibration files has been used the file names is located here (file names of the calibration files included dates and version number of when the are created)
B15	cal_source	String	Information of what has been considered in the data production (sc attitude, other instruments etc)
B16	xsubtitle	String	Units
B17	ysubtitle	String	Units
B18	cal_v_const1	String	Fixed convert information from measured binary values to physical units, variables from ground testing and design
B19	cal_v_const2	String	Fixed convert information from measured binary values to physical units, variables from space testing
B20	zsubtitle	String	Units
			- Blank intentionally – as a jump in the numbering

No	Header Field Name	Type	Description
B30	char_size	String	Suggested information for plotting purposes.
B31	xtitle	String	Suggested information for plotting purposes.
B32	ytitle	string	Suggested information for plotting purposes.
B33	yrange	Float array	Suggested information for plotting purposes.
B34	ystyle	Integer	Suggested information for plotting purposes.
B35	ylog	Integer	Suggested information for plotting purposes.
B36	ztitle	String	Suggested information for plotting purposes.
B37	zrange	Float array	Suggested information for plotting purposes.
B38	zlog	Integer	Suggested information for plotting purposes.
B39	spec	Integer	Plotting option, Data type (spectrogram = 1)
B40	labels	String Array	When different data sources and products are combined in the y-filed for the CDF file, this fields provide the information of in which order the products are written
B41	colors	Integer Array	Suggested information for plotting purposes.
B42	labflag	Integer	Suggested information for plotting purposes.
B43	noerrorbars	Integer	Suggested information for plotting purposes.

6.1.1 Calibrated data file structure

EUV calibrated data files will be archived with PDS as Common Data Format (CDF) The contents of the EUV CDF files are described in Table 18.

Table 18: Contents for *euv.calibrated:data.bands* data file.

Field Name	Product Name	Bytes	Description
A1-A18, B1-B11, B14, B16- B17 B30-B35, B40-43	EUV_header		The information for the header provided in the rows presented in Table 16 and Table 17. One element per file
x	TIME_UNIX	DOUBLE	Unix time for this data record, one element per measurement (BANDS)
y	BANDS	FLOAT	Irradiance (W/m ²) in each bandpass, three elements per time step
dy	UNC_MEAS	FLOAT	The measurement uncertainty of the irradiances. Same number of elements BANDS.
v	WAVE	FLOAT	The wavelength (nm) of the center of each band, 3 elements, once per file.
dv	UNC_TOT	FLOAT	The total combined uncertainty of the irradiances. Same number of elements BANDS.

flag	BANDS_FLAG	FLOAT	A quality flag for each time step
------	------------	-------	-----------------------------------

6.1.2 Modelled data file structure

EUV modelled data files will be archived with PDS as Common Data Format (CDF). The contents of the EUV CDF files are described in Table 19 for the daily spectra and Table 20 for the minute spectra

Table 19: Contents for euv.modelled:data.daily.spectra data files.

Field Name	Product Name	Bytes	Description
A1-A18, B1-B5, B8- B11, B14- B17, B30- B35, B40-43	EUV_header		The information for the header provided in the rows presented in Table 16 and Table 17, One element per file
x	TIME_UNIX	DOUBLE	Unix time for this data record, one element per file (daily:spectra), noon UTC day.
y	SPECTRA	FLOAT	The modelled irradiance spectrum (Watts/m2/nm), 190 elements per file.
dy	UNC	FLOAT	The model uncertainty (%), 190 elements, once per file
v	WAVE	FLOAT	The wavelength (nm) of the center of each bin in the spectra, 190 elements, once per file
dv	COMB_UNC	FLOAT	Combined total uncertainty (%), 190 elements, once per file. (empty for version 1 of data product, placeholder for later versions of product)
flag	SPEC_FLAG	FLOAT	A quality flag for the daily spectrum

Table 20: Contents for euv.modelled:data.minute.spectra data files.

Field Name	Product Name	Bytes	Description
A1-A18, B1-B5, B8- B11, B14- B17, B20, B30-B38, B40-43	EUV_header		The information for the header provided in the rows presented in Table 16 and Table 17, One element per file
x	TIME_UNIX	DOUBLE	Unix time for this data record, one element per minute, i.e. 1440 per file (minute:spectra)
y	SPECTRA	FLOAT	The modelled irradiance spectrum (Watts/m2/nm), 190 elements per time step and 1440 spectra per file

dy	UNC	FLOAT	The model uncertainty (%), 190 elements, once per file
v	WAVE	FLOAT	The wavelength (nm) of the center of each bin in the spectra, 190 elements, once per file
dv	COMB_UNC	FLOAT	Combined total uncertainty (%), 190 elements, once for each minute. (empty for version 1 of data product, placeholder for later versions of product)
flag	SPEC_FLAG	FLOAT	A quality flag for each time step

6.2 Document Product File Formats

EUV will provide the calibrated and modelled data in CDF formats. The processing from raw to calibrated/modelled is documented with the archiving ASCII files with the IDL program scripts. The SIS document (this document) will be archived in Portable Document Format (PDF).

6.3 PDS Labels

PDS labels are ASCII text files written, in the eXtensible Markup Language (XML). All product labels are detached from the digital files (if any) containing the data objects they describe (except Product_Bundle). There is one label for every product. Each product, however, may contain one or more data objects. The data objects of a given product may all reside in a single file, or they may be stored in multiple separate files. PDS4 label files must end with the file extension “.xml”.

The structure of PDS label files is governed by the XML documents described in Section 6.3.1.

6.3.1 XML Documents

For the MAVEN mission PDS labels will conform to the PDS master schema based upon the 1.1.0.1 version of the PDS Information Model for structure, and the 1.1.0.1 version of the PDS schematron for content. By use of an XML editor these documents may be used to validate the structure and content of the product labels.

The PDS master schema and schematron documents are produced, managed, and supplied to MAVEN by the PDS. In addition to these documents, the MAVEN mission has produced additional XML documents which govern the products in this archive. These documents contain attribute and parameter definitions specific to the MAVEN mission.. A list of the XML documents associated with this archive is included in this document in the XML_Schema collection section for each bundle.

Examples of PDS labels required for the EUV archive are shown in Appendix C (bundle products), Appendix D (collection products), and Appendix E (basic products).

6.4 Delivery Package

Data transfers, whether from data providers to PDS or from PDS to data users or to the deep archive, are accomplished using delivery packages. Delivery packages include the following required elements:

1. The package which consists of a compressed bundle of the products being transferred.
2. A transfer manifest which maps each product's LIDVID to the physical location of the product label in the package after uncompression.
3. A checksum manifest which lists the MD5 checksum of each file included in the package after uncompression.

EUV archive delivery packages (including the transfer and checksum manifests) for delivery to PDS are produced at the MAVEN SDC.

6.4.1 The Package

The directory structure used in for the delivery package is described in the Appendix in Section F.1. Delivery packages are compressed using either [zip, or tar/gzip – SDC text] and are transferred electronically using the ssh protocol.

6.4.2 Transfer Manifest

The “transfer manifest” is a file provided with each transfer to, from, or within PDS. The transfer manifest is external to the delivery package. It contains an entry for each label file in the package, and maps the product LIDVID to the file specification name for the associated product's label file. Details of the structure of the transfer manifest are provided in Section F.2.

The transfer manifest is external to the delivery package, and is not an archive product. As a result, it does not require a PDS label.

6.4.3 Checksum Manifest

The checksum manifest contains an MD5 checksum for every file included as part of the delivery package. This includes both the PDS product labels and the files containing the digital objects which they describe. The format used for a checksum manifest is the standard output generated by the md5deep utility. Details of the structure of the checksum manifest are provided in section F.3.

The checksum manifest is external to the delivery package, and is not an archive product. As a result, it does not require a PDS label.

Appendix A Support staff and cognizant persons

Table 21: Archive support staff

EUV team			
Name	Address	Phone	Email
Dr. Francis G. Eparvier	LASP/Univ. Colorado, 3665 Discovery Drive, Bouder, CO 80303	303-492-4546	eparvier@colorado.edu
Dr. Laila Andersson	LASP/Univ. Colorado, 3665 Discovery Drive, Boulder, CO 80303	303 492 1689	Laila.andersson@lasp.colorado.edu
UCLA			
Name	Address	Phone	6.5 Email
Dr. Steven Joy PPI Operations Manager	IGPP, University of California 405 Hilgard Avenue Los Angeles, CA 90095-1567 USA	+001 310 825 3506	sjoy@igpp.ucla.edu
Mr. Joseph Mafi PPI Data Engineer	IGPP, University of California 405 Hilgard Avenue Los Angeles, CA 90095-1567 USA	+001 310 206 6073	jmafi@igpp.ucla.edu

Appendix B Naming conventions for MAVEN science data files

This section describes the naming convention used for science data files for the MAVEN mission.

Raw (MAVEN Level 0):

mvn_<inst>_<grouping>_l0_<yyyy><mm><dd>_v<xxx>.dat

Level 1, 2, 3+:

mvn_<inst>_<level>_<descriptor>_<yyyy><mm><dd>T<hh><mm><ss>_v<xx>_r<yy>.<ext>

Code	Description
<inst>	3-letter instrument ID (see table below)
<grouping>	Three-letter code: options are all, svy, and arc for all data, survey data, and archive data respectively. Primarily for PF to divide their survey and archive data at Level 0. (Not used for EUV)
<yyyy>	4-digit year
<mm>	2-digit month, <i>e.g.</i> 01, 12
<dd>	2-digit day of month, <i>e.g.</i> 02, 31
<hh>	2-digit hour, separated from the date by T. OPTIONAL. (Not used for EUV)
<mm>	2-digit minute. OPTIONAL. (Not used for EUV)
<ss>	2-digit second. OPTIONAL. (Not used for EUV)
v<xx>	2-digit data file version: For the EUV monitor, the version number will reflect if the structure of the CDF-file has changed.
r<yy>	2-digit data revision: For the EUV monitor, the revision number will reflect if the EUV team has reprocessed the data that already were submitted to the SOC.
<descriptor>	A description of the data. Defined by the creator of the dataset. There are no underscores in the value.
.<ext>	File type extension: .fits, .txt, .cdf, .png (EUV will use cdf)
<level>	A code indicating the MAVEN processing level of the data, EUV will use l2 for the calibrated data and l3 for the modelled

Instrument name	<instrument>
EUV	euv
IUVS	iuv
NGIMS	ngi
LPW	lpw
MAG	mag
SEP	sep
SWIA	swi
SWEA	swe
STATIC	sta
PF package	pfp

Appendix C Sample Bundle Product Label

This section provides a sample bundle product label.

Appendix D Sample Collection Product Label

This section provides a sample collection product label.

Appendix E Sample Data Product Labels

This section provides sample product labels for the various data types described in this document.

Appendix F PDS Delivery Package Manifest File Record Structures

The delivery package includes two manifest files: a transfer manifest, and MD5 checksum manifest. When delivered as part of a data delivery, these two files are not PDS archive products, and do not require PDS labels files. The format of each of these files is described below.

F.1 Transfer Package Directory Structure

[Insert a description of the directory structure contained in the delivery package.]

F.2 Transfer Manifest Record Structure

The transfer manifest is defined as a two field fixed-width table where each row of the table describes one of the products in the package. The first field defines the LIDVID of each product in the package. The second field defines the file specification name of the corresponding product label in the package. The file specification name defines the name and location of the product relative to the location of the bundle product.

F.3 Checksum Manifest Record Structure

The checksum manifest consists of two fields: a 32 character hexadecimal (using lowercase letters) MD5, and a file specification from the root directory of the unzipped delivery package to every file included in the package. The file specification uses forward slashes (“/”) as path delimiters. The two fields are separated by two spaces. Manifest records may be of variable length. This is the standard output format for a variety of MD5 checksum tools (*e.g.* md5deep, etc.).