

FPI Instrumentation Control Software

**National Center for Atmospheric Science
at the High Altitude Observatory**

Elizabeth Vickery

Mentor: Dr. Qian Wu

Programming Guide: Alice Lecinski


Outline

- × **Abstract**
- × **Background: The Upper Atmosphere**
- × **The Experiment**
- × **The Fabry-Perot Interferometer**
- × **The Software**
- × **What is left?**
- × **Questions**

Abstract

Develop software interface to control FPI instrumentation. The primary task will be to develop code for the FPI-Antarctica instrument to be installed at Palmer Station, Antarctica.


Earth's Atmosphere and Temperature Profile

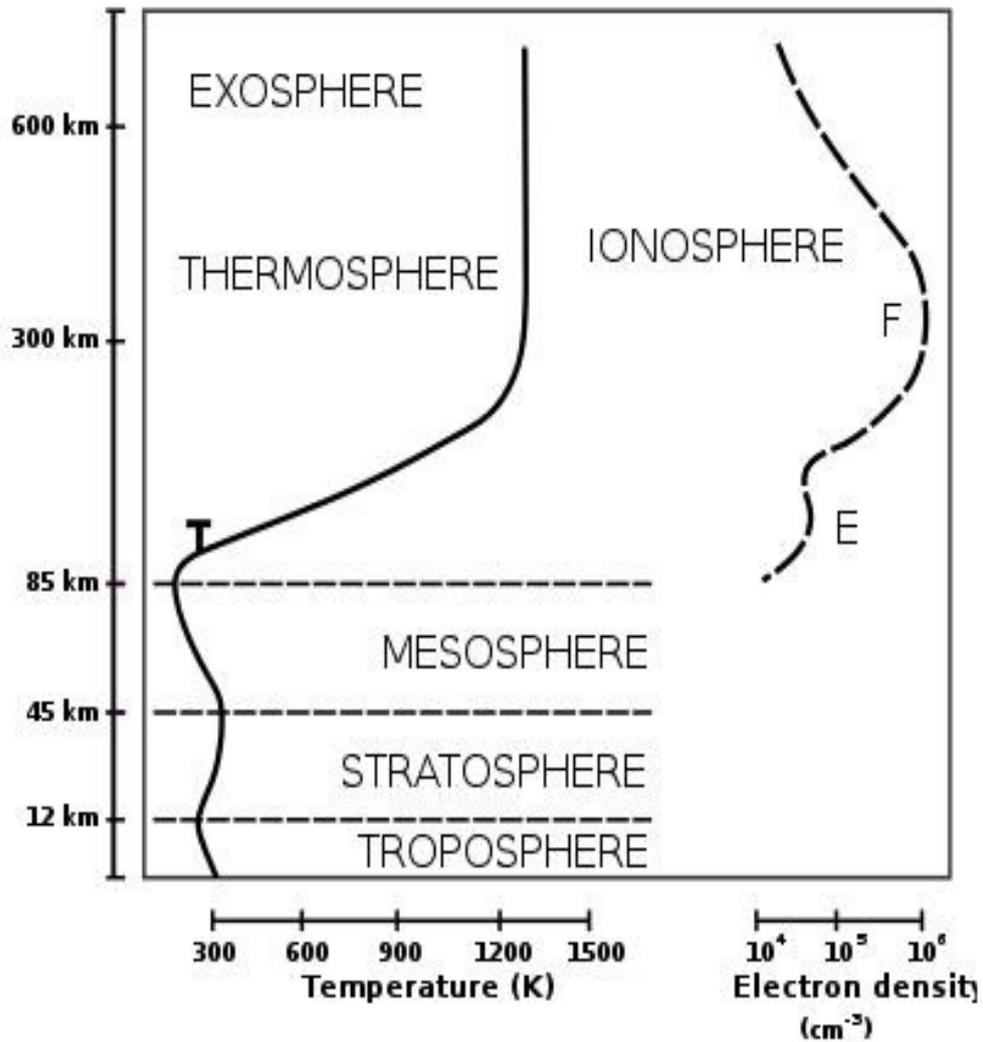


For the FPI-Antarctica experiment, we are mainly concerned with the Mesosphere and the Lower Thermosphere.

Looking at the Ionosphere's F2-layer, neutral meridional winds can be derived from the F2-layer peak height and peak density. This is caused by the relationship between the winds and the variable peak height.

The Upper Atmosphere

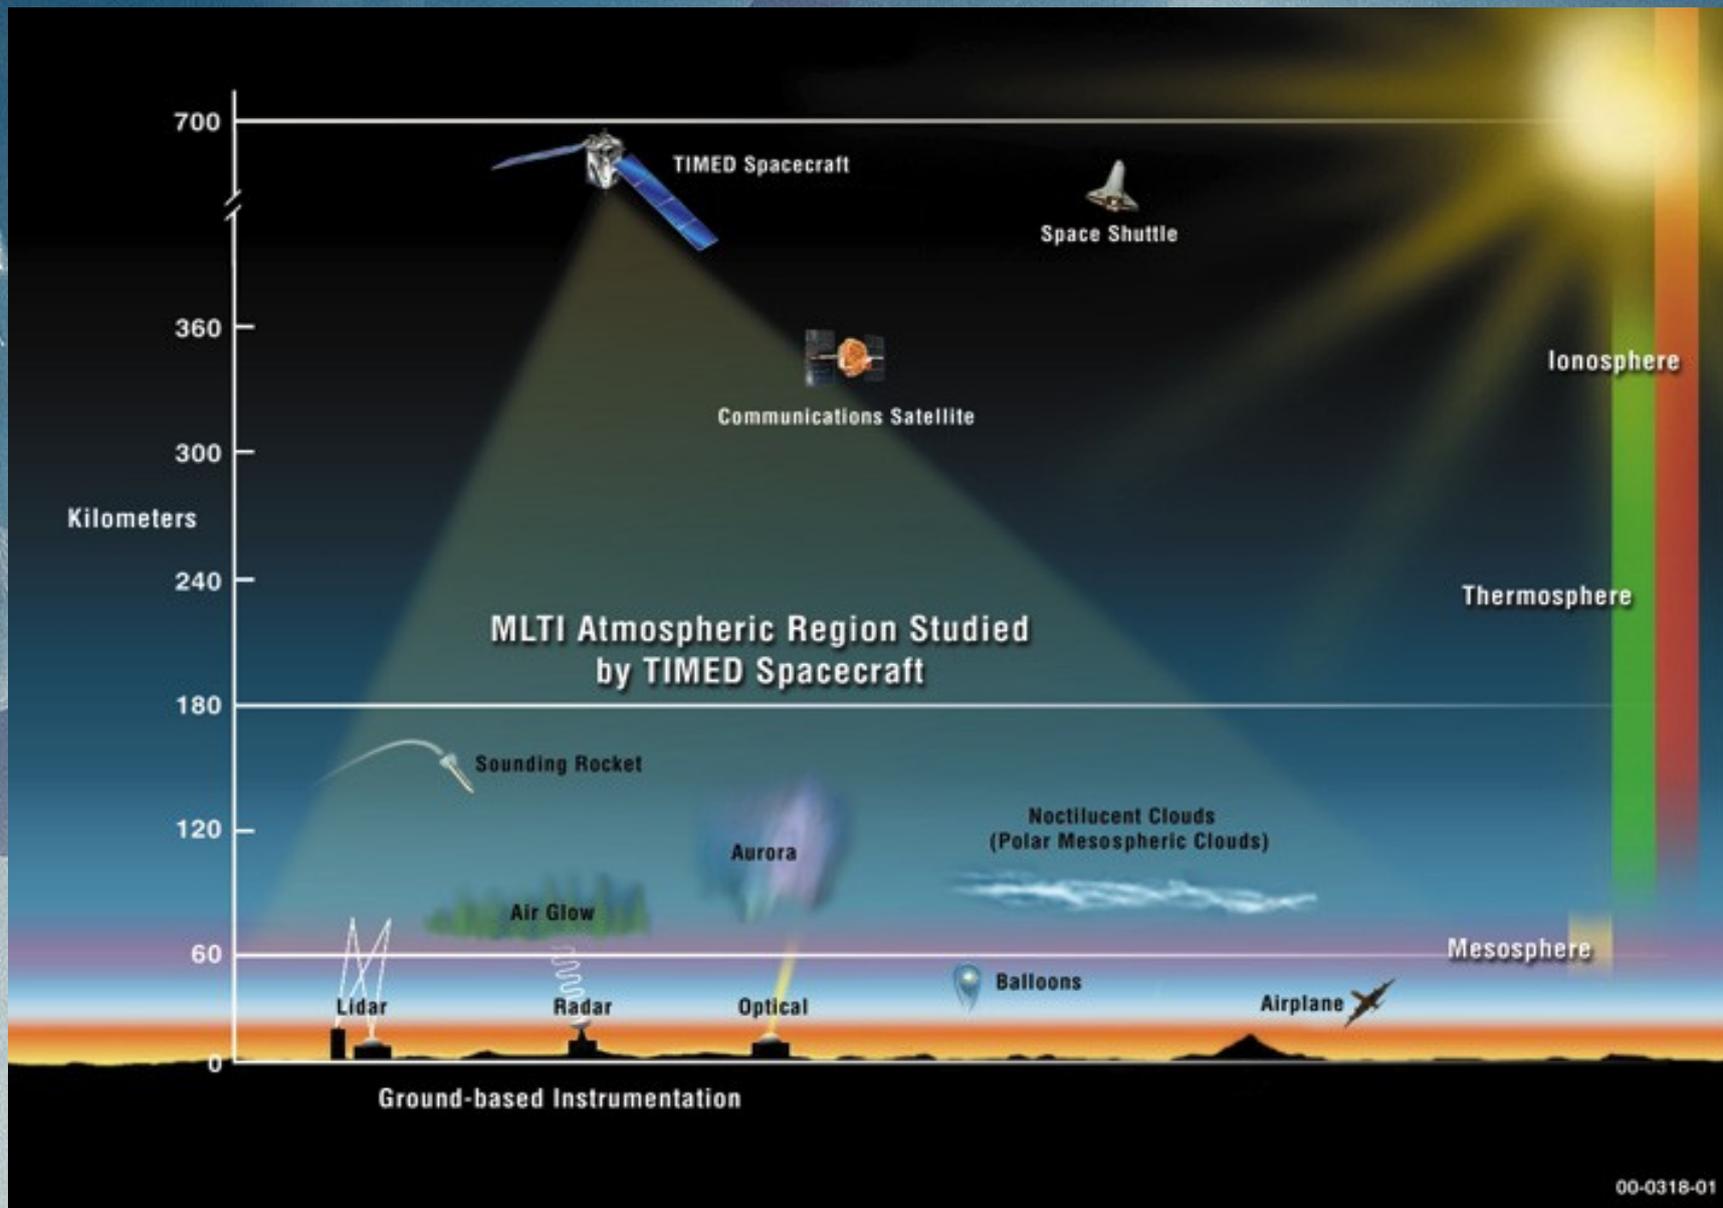

The Experiment?

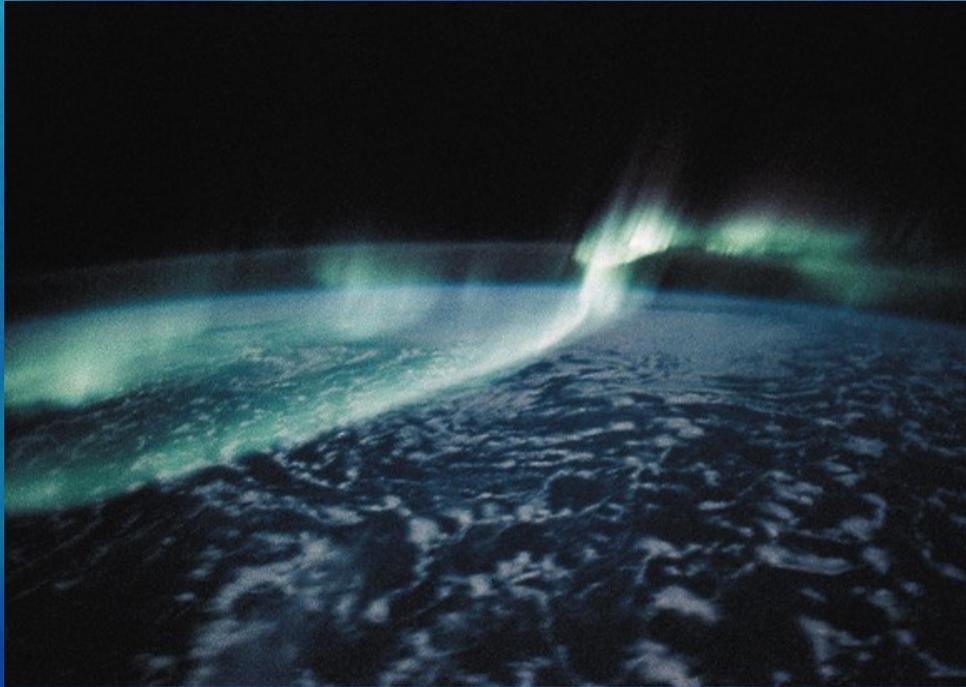

The Fabry-Perot Interferometer Antarctica (FPI-Antarctica) has been made to take observations of vertical winds and two dimensional atmospheric motions in the lower-thermosphere and the mesosphere region through measurement of the Doppler shift and the expansion of airglow emission lines. This instrument will be installed in October 2010 at Palmer Station in Antarctica. This project is in collaboration with the University of Alaska.

Why do we need to know upper atmosphere neutral wind tide?

- Tides are generated in the stratosphere and strongly affected by changes in the upper atmosphere such as:
 - Quasi-biennial oscillation (QBO) in the equatorial region
 - Sudden stratosphere warming at high latitudes
- Long term trends in tides may be linked with changes in the stratosphere.
- Tides also have a great impact on the equatorial ionosphere through dynamo effect.


The Fabry-Perot Interferometer

Major Components

- Sky scanner
- Filters & filter wheel
- Etalon & chamber
- Thermal & pressure control
- Focusing lens
- Detector
- Computer system

Highlights

- Computerized micrometer
- Daily laser calibration
- High degree automation
- Michigan heritage

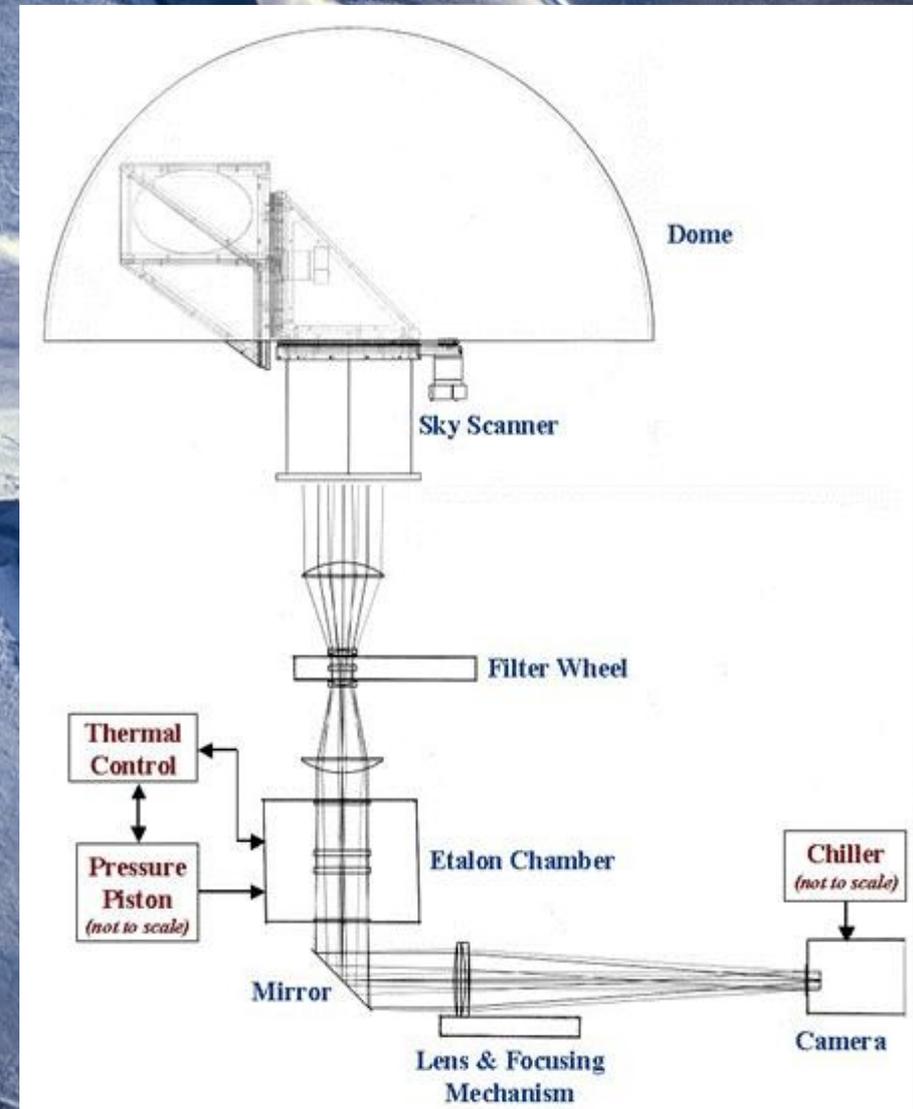


Sky Scanner


-The Sky Scanner steers the instrument to different directions with two rotating mirrors.

-Rotation of one mirror changes the zenith angle, and rotating both changes the azimuth angle.

-Calibration of the sky scanner brings the pointing accuracy of 1 degree.

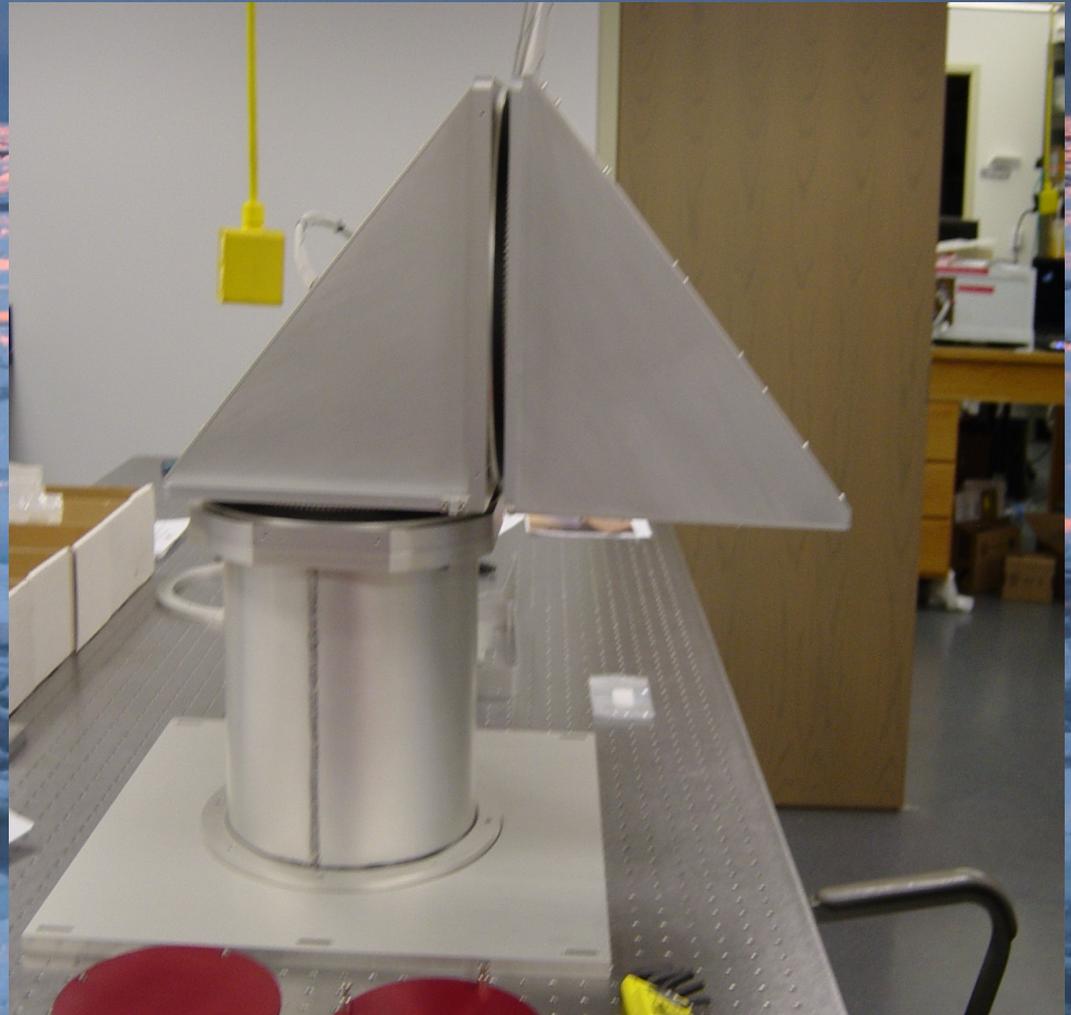

Filter Wheel

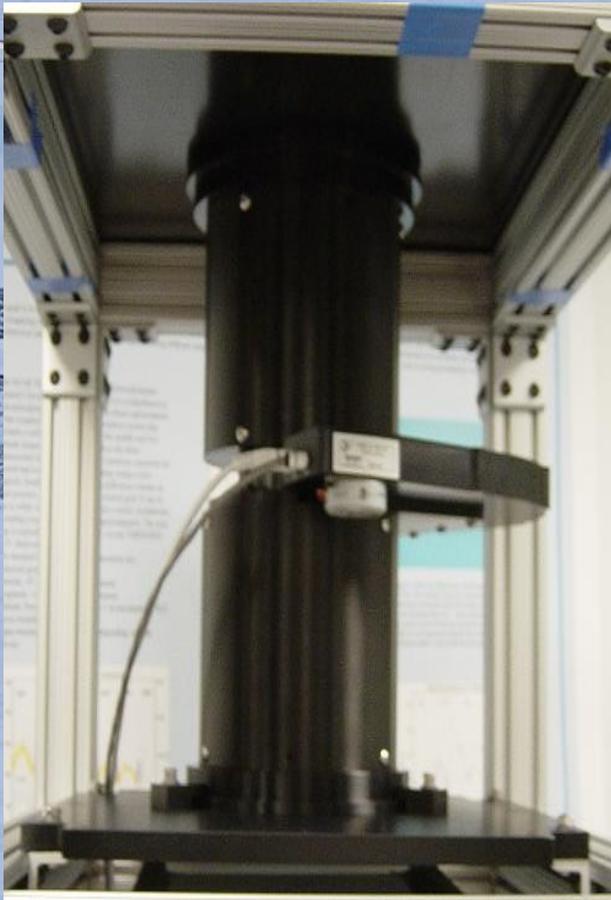


An 8-position Filter Wheel has been installed on the FPI. The emission lines in the filter wheel we are measuring at include:

- OH⁻ at 8920 Å
- O⁻ at 6300 Å
- O⁻ at 5577 Å
- O⁺ at 7320 Å for ion drift
(mostly used during twilight)
- NA at 5893 Å
- Laser
- Dark (nothing)

Etalon Chamber

The Etalon is mounted and placed inside a temperature and pressure controlled chamber.


When calibrating the Etalon Chamber a pressure piston is moved to change the pressure inside the chamber.

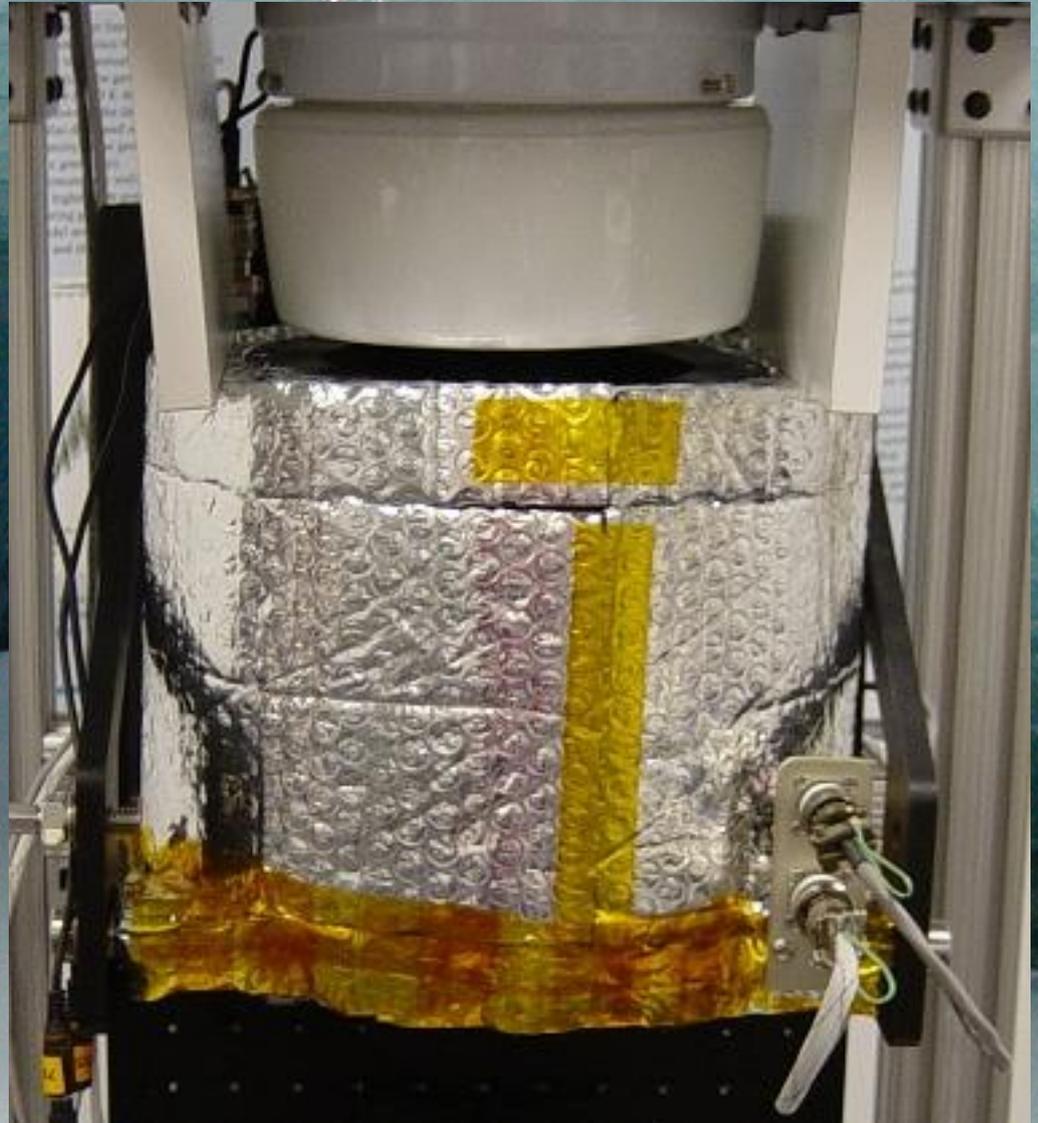

Etalon

The Coating
Reflectivity of the
Etalon is 80% +/-
4.5% over 500-
900nm.

The three etalon
spacers are made of
zerodur with 15mm
diameter and 20mm
length.

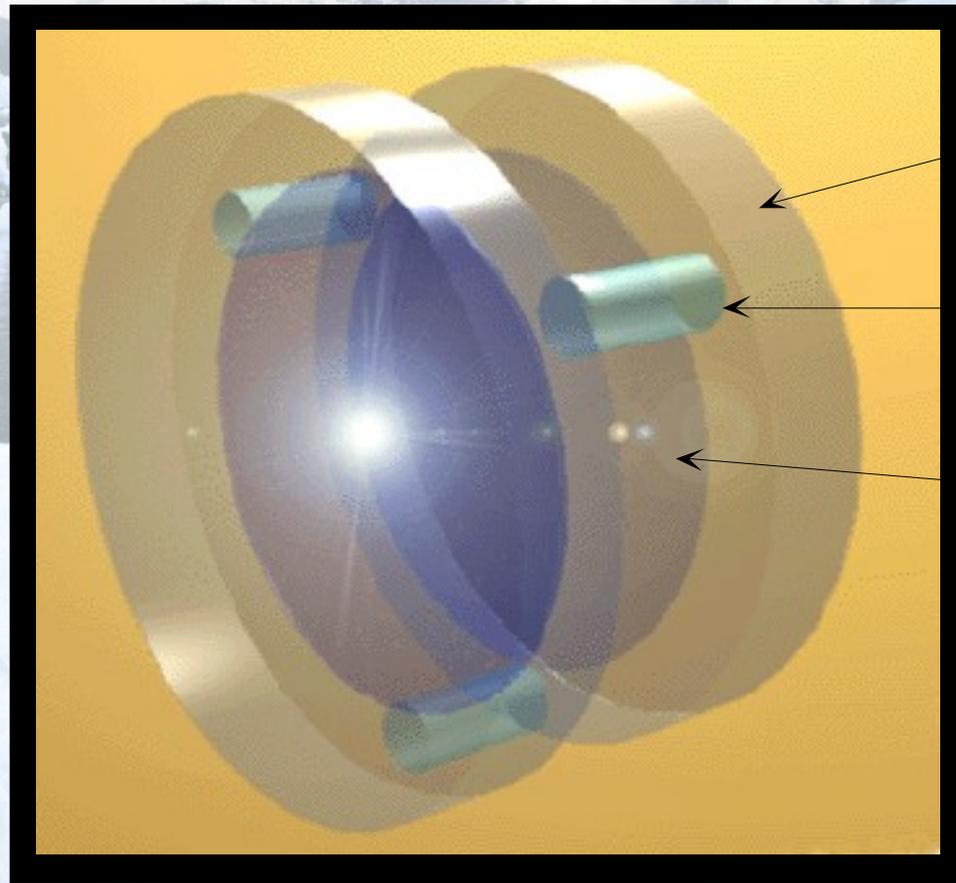


Plate

Post


Coating

Etalon

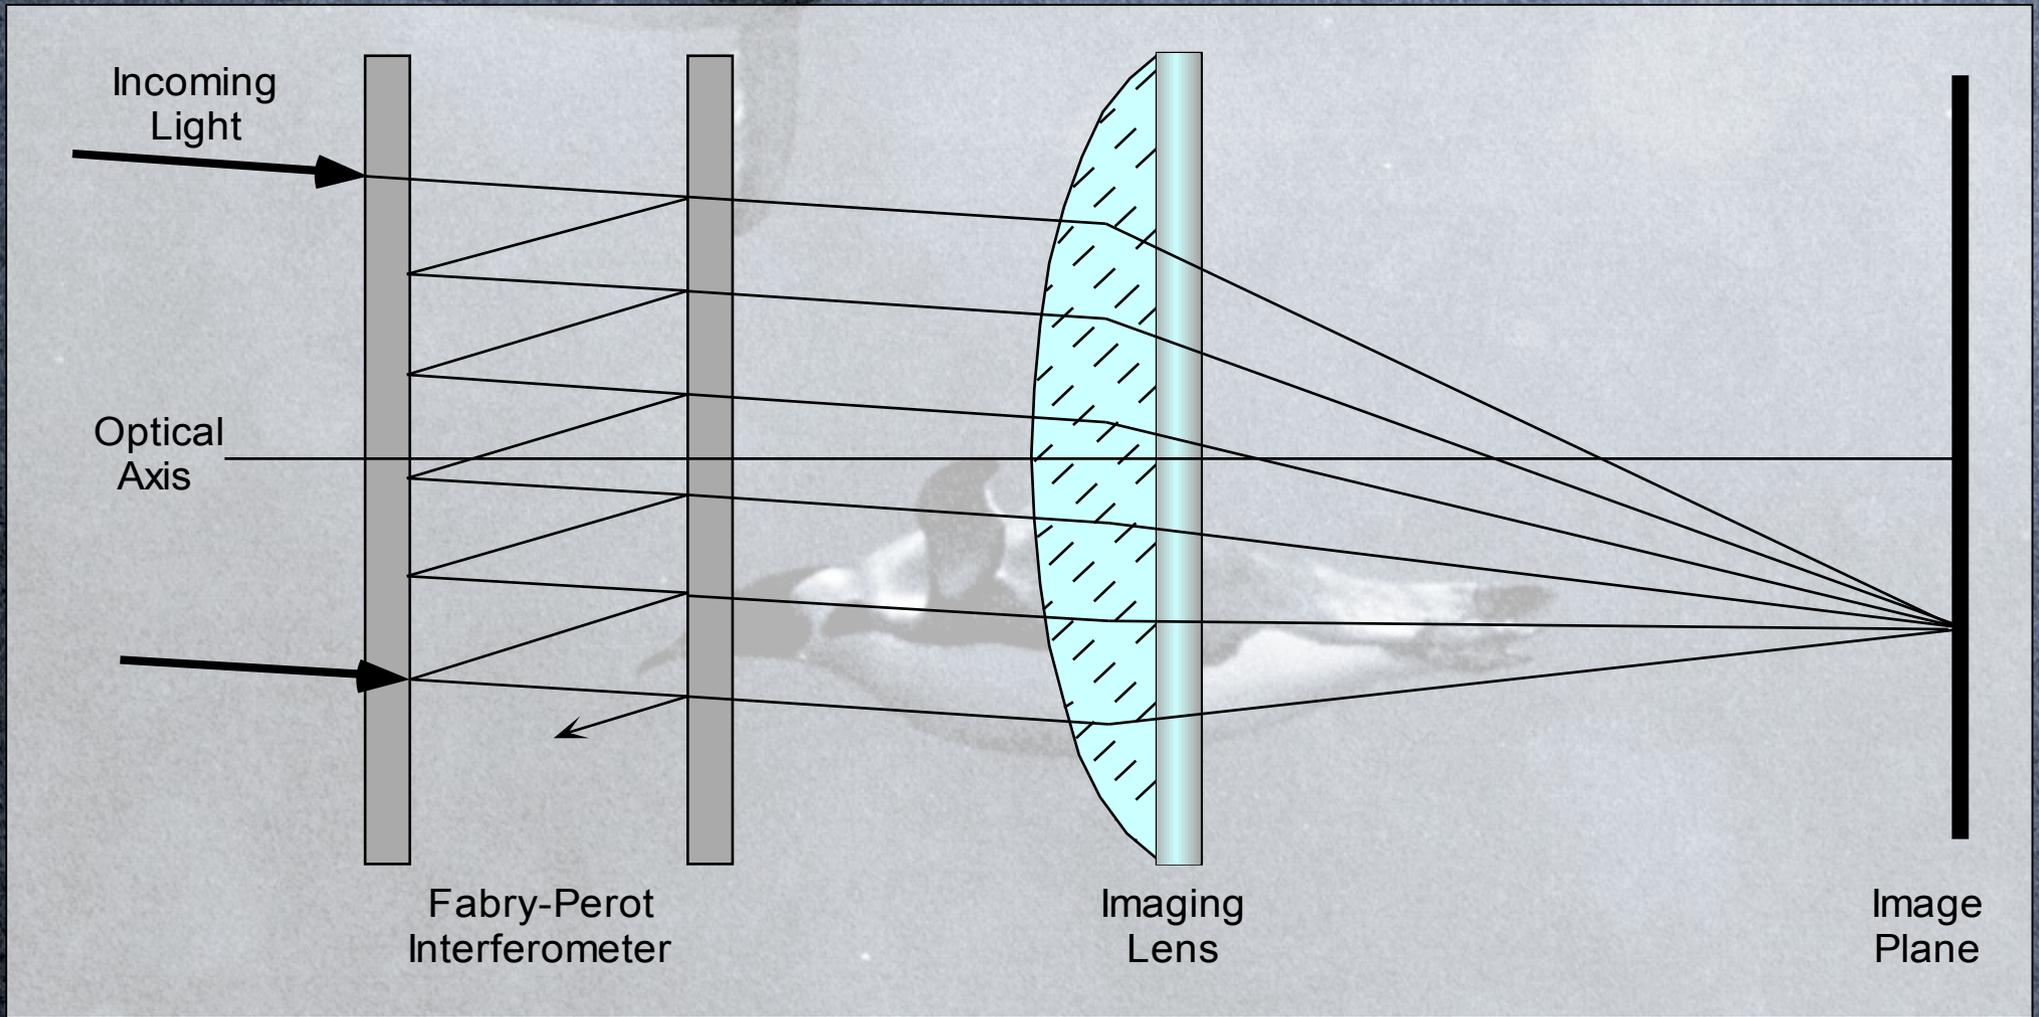

Princeton Pro-EM 1024B CCD Camera

One of the features of this camera is that it has an electron amplification circuit to multiply the electron count in each pixel in order to reduce the readout noise.

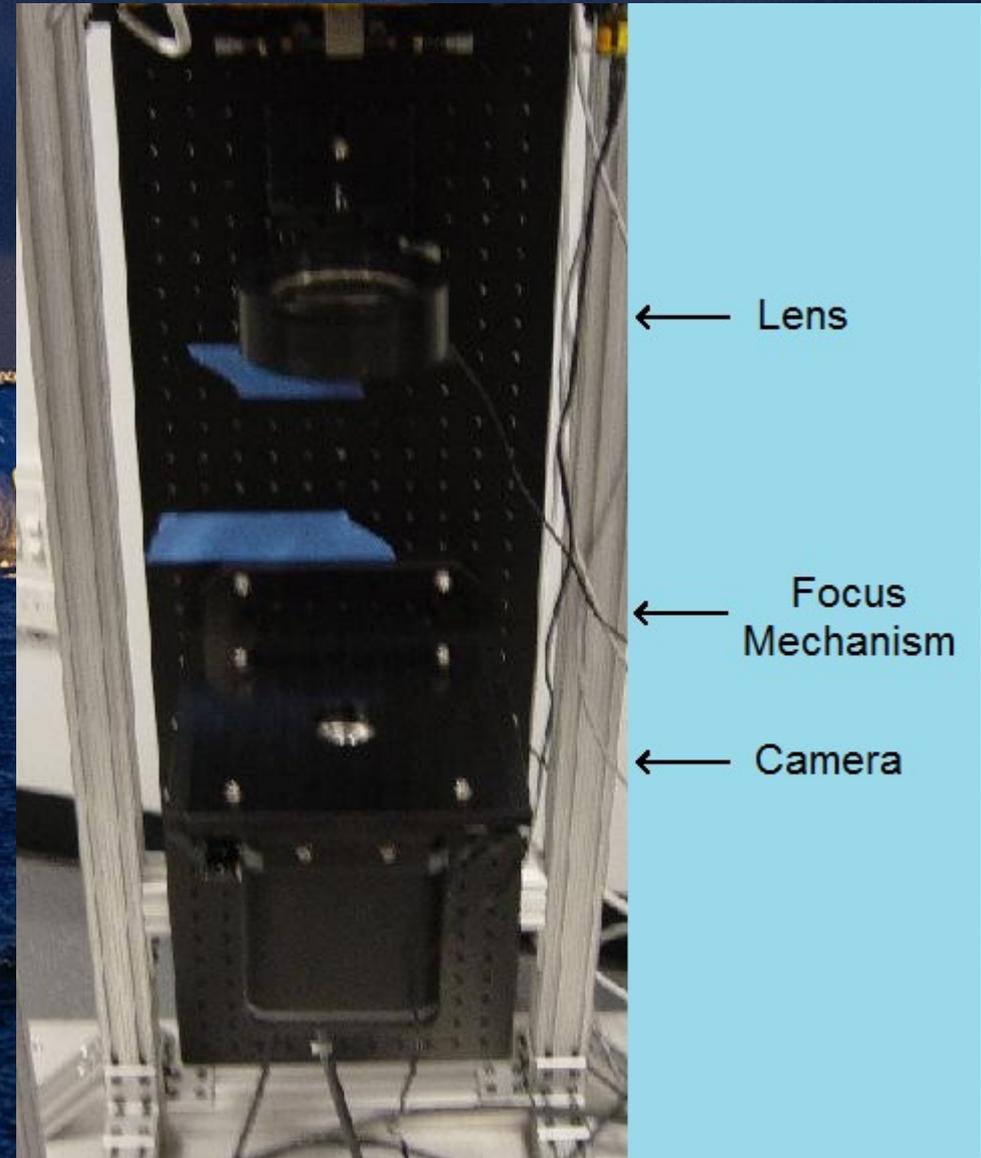

FPI Operational Mode

Emission	Integration time	Wind Errors	Altitude
OH 8920 A	3 minutes	6 m/s	87 km
O 5577 A	3 minutes	1 m/s	97 km
O 6300 A	5 minutes	2-6 m/s	250 km

What has been done?


- ✓ Debugged previous test code to work with the updated camera.
- ✓ Wrote hardware code to convert the camera from comm port to usb port.
- ✓ Debugged the software for the filter wheel.
- ✓ Improved the user interface of the display.
- ✓ Wrote software to increase the multiplicative factor of a single electron as it hits the camera by any percentage (default is 150%).
- ✓ Tested the software successfully with each component of the FPI.

FPI Fringes


How do these fringes work?

From measuring the diameter between the rings we can calculate the wavelength.

Once a wavelength is calculated, we can look at the Doppler shift to find the neutral wind tide's speed.


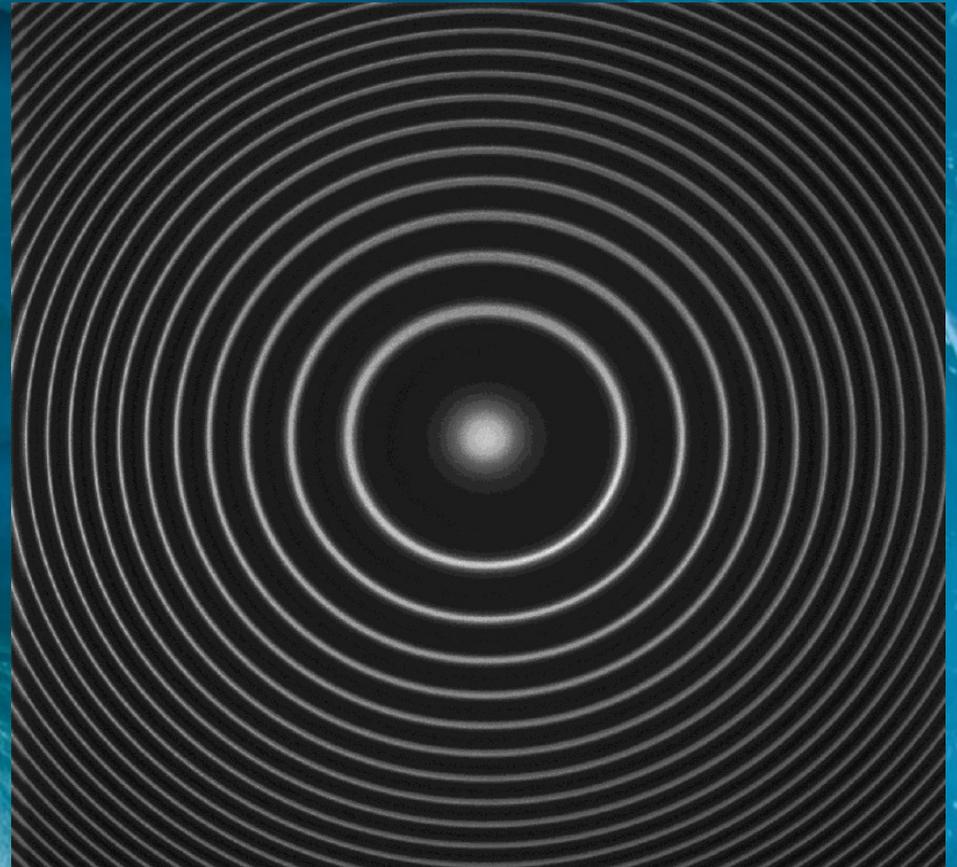


FPI Fringes

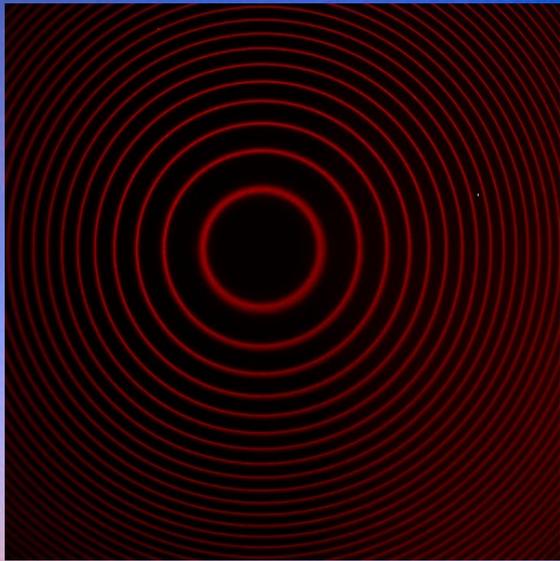


Laser

8920

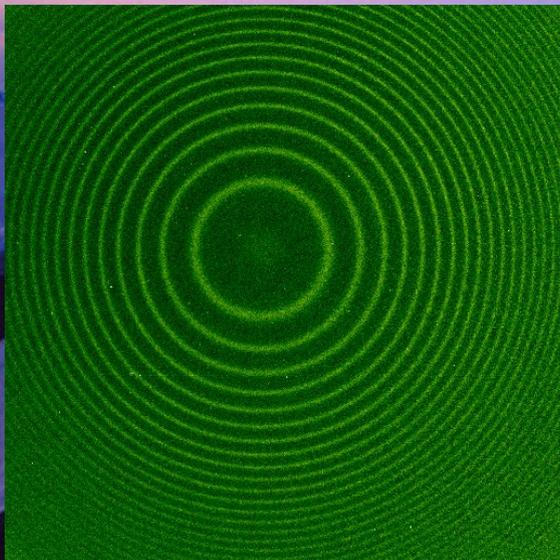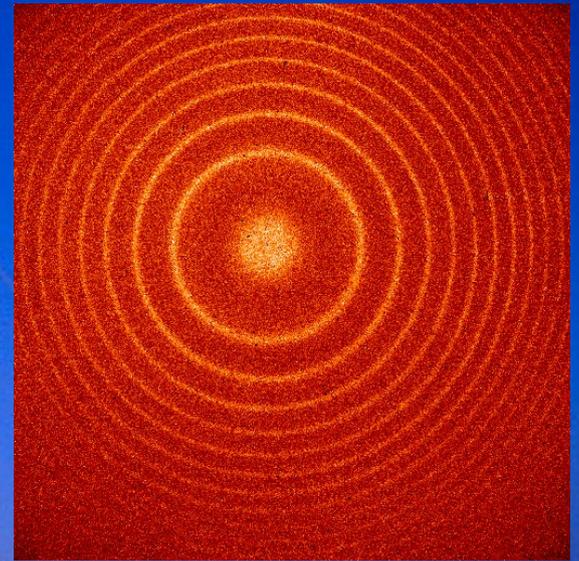

5577

6300

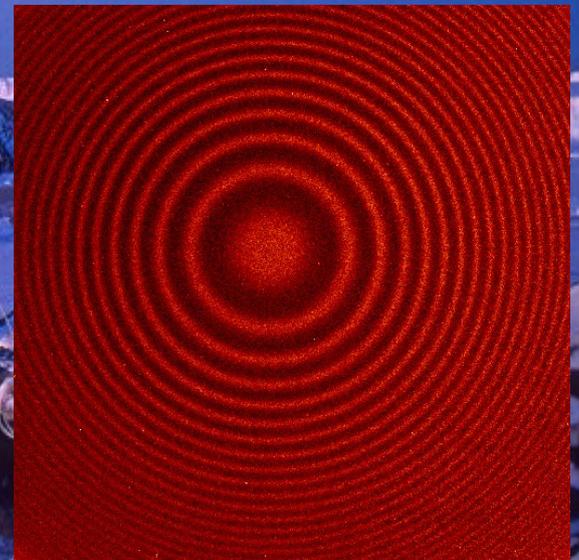

Neutral Wind Output Data

What is the importance of this data?

The Antarctica Peninsula has had some strange ionosphere variations, which are thought to be caused by thermospheric winds. The FPI-Antarctica project was created in order to answer these questions. Therefore, having the instrument installed at the Pاملer station is crucial because the station is located in the middle of the Antarctic Peninsula.



Mesospheric Wind Semidiurnal Tide

Why do we measure the Mesosphere?

The Mesosphere is a region of the atmosphere we know very little about. It is strongly influenced by tides from the troposphere and stratosphere. These wind tides that reach the mesosphere become amplified due to the low air density. Hence, variations in the mesosphere can be a manifestation of changes in the lower atmosphere with an amplification.

The FPI measures the emission lines of the 8920 and 5577 for the mesospheric and lower-thermospheric winds.

Mesosospheric Wind Semidiurnal Tide

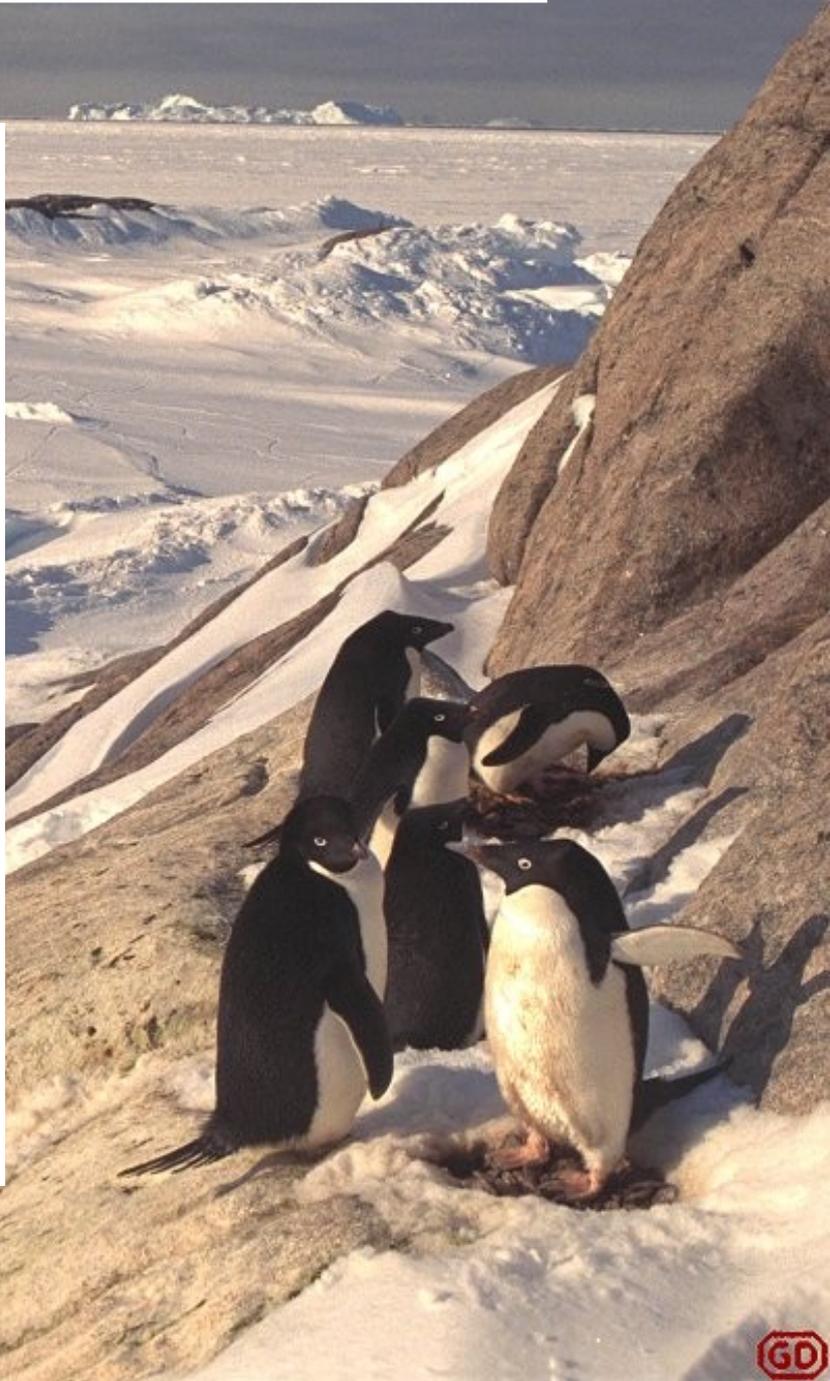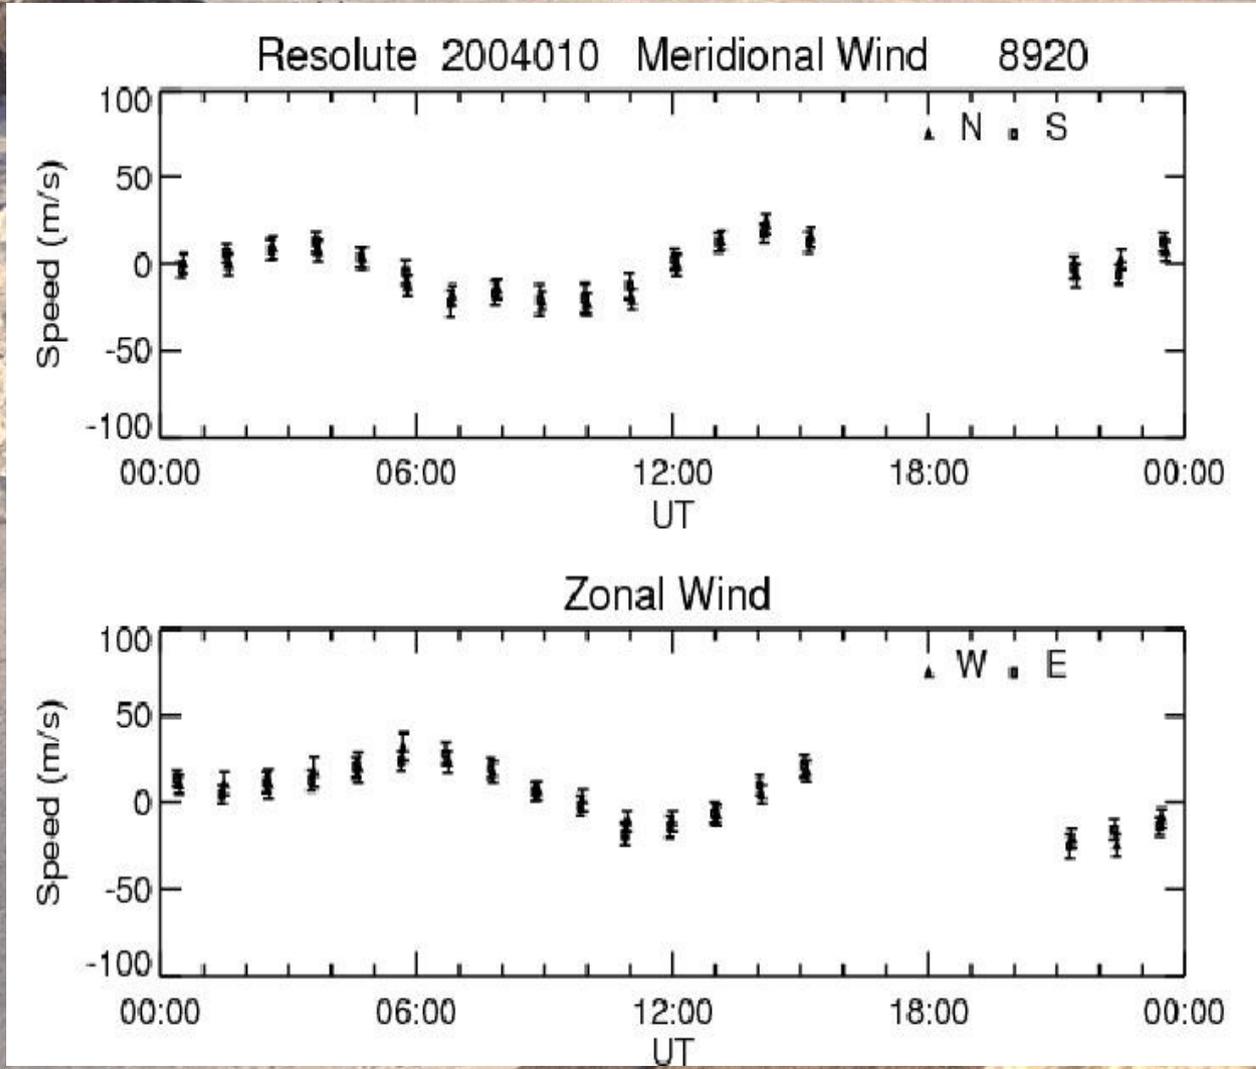

Lower Thermospheric Wind Semidiurnal tide

Why do we measure the Thermosphere?


Because we are trying to understand the variations in the Ionosphere, we need to know the variations in the thermosphere.

This is because thermospheric winds can push the ionosphere up and down along the geomagnetic field lines; thus, changing the ionosphere.

Therefore, in order to understand the ionosphere, we must know the thermospheric winds.

The FPI measures the emission line 6300 for thermospheric winds and, as stated previously, the FPI measures the emission lines of the 8920 and 5577 for the thermospheric winds.

Lower Thermospheric Wind Semidiurnal tide

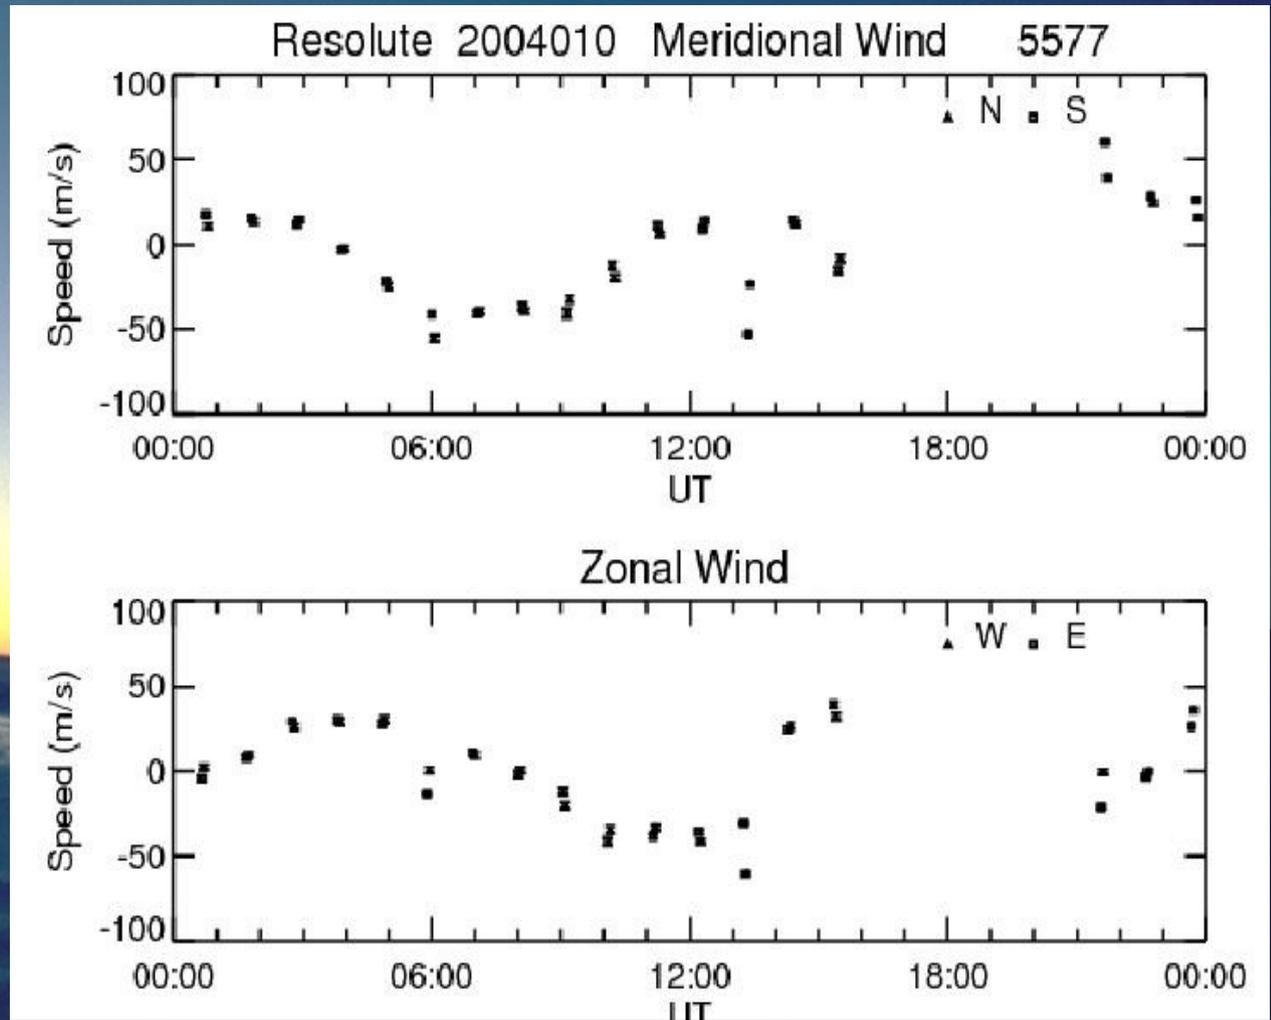

What is left?

- **Testing**
 - Simulating real time events with the FPI will output data that will determine if the instrumentation is running properly. Adjustments to the FPI will be accommodated at this time.
- **Transportation and Installation**
 - October 2010, the FPI will be taken to Palmer Station in Antarctica. Here the instrument will be installed and will start taking observations.


Acknowledgments

I would like to thank all of the following people:

- Everyone at HAO and NCAR
- My mentor: Dr. Qian Wu
- My programming guide: Alice Lecinski
- Dr. Marty Snow and Erin Wood
- Finally to all of my fellow REUers, you guys have made this summer everything but unexceptional. I will miss you all.

HOLD IT!!!

Questions?

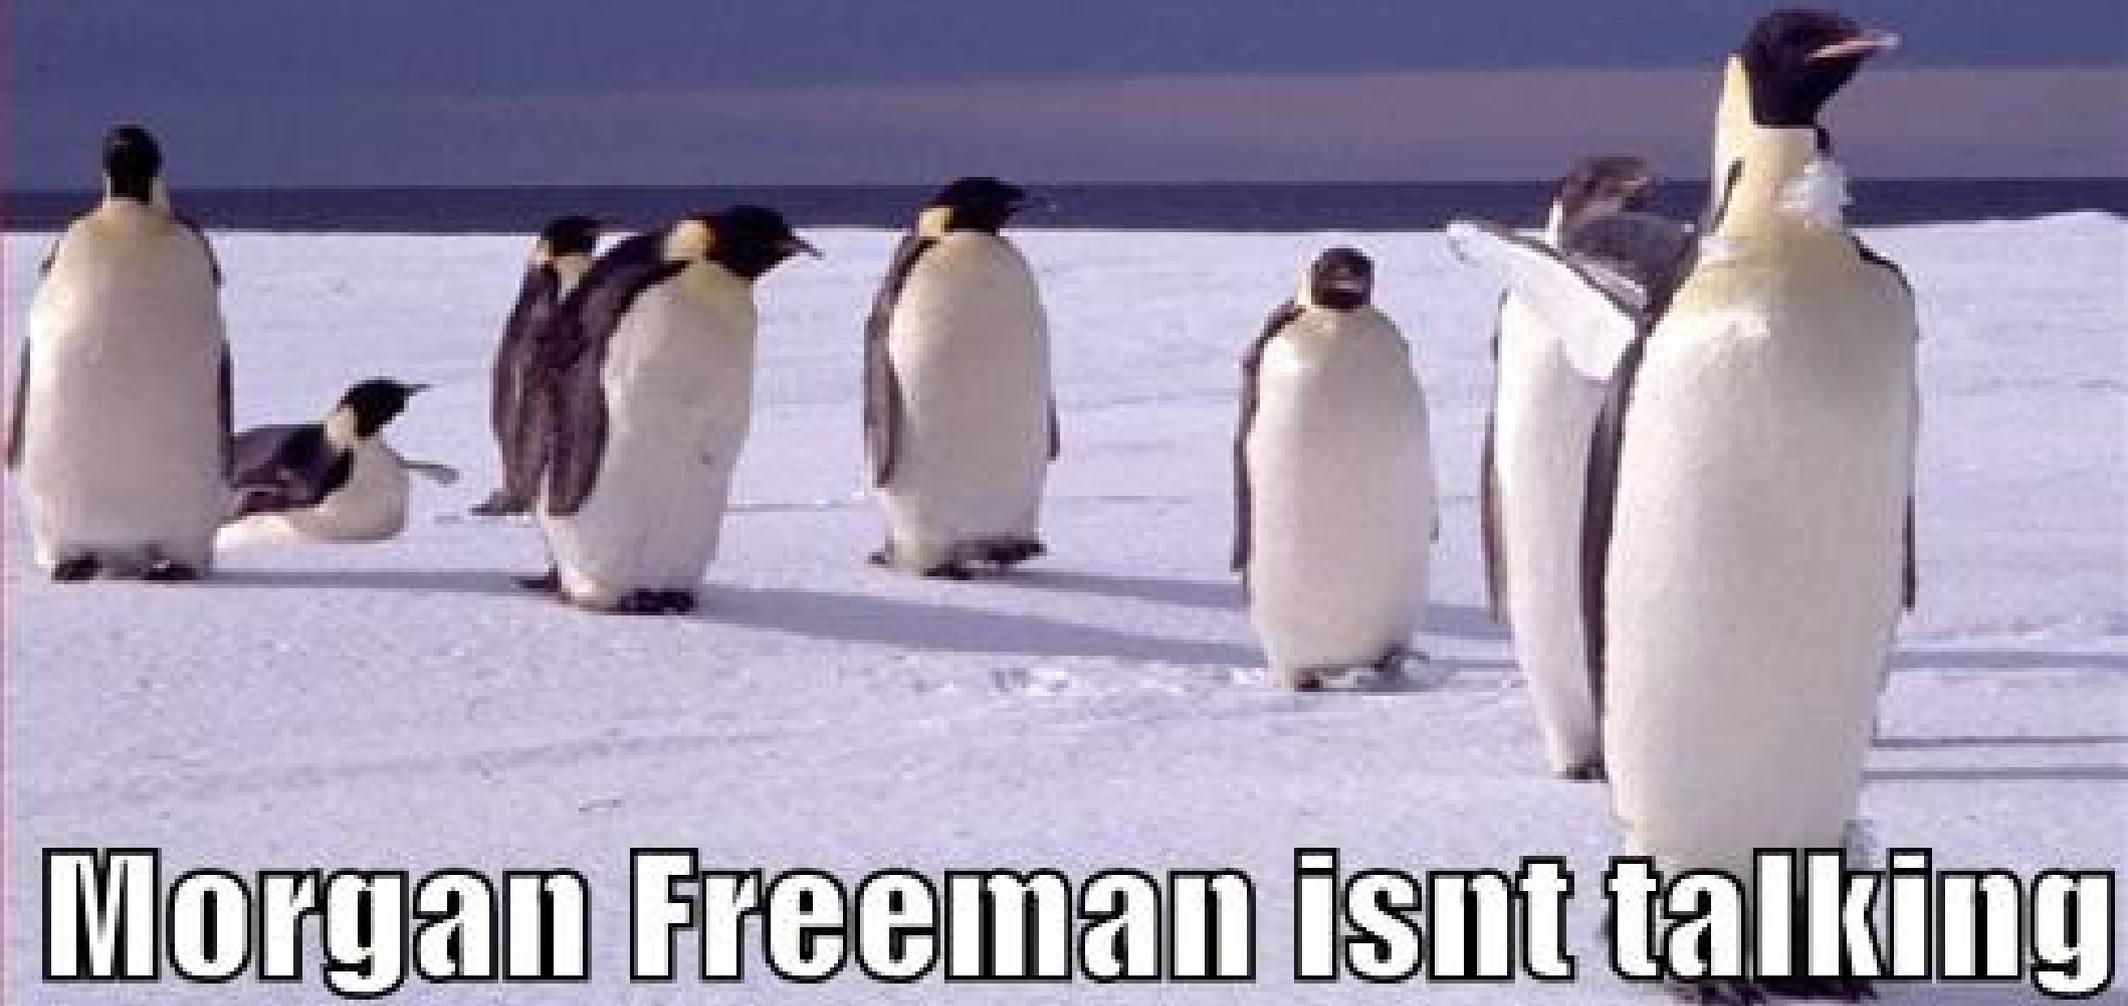

Morgan Freeman isnt talking